

nola®



Gard Park Bench

Design Odin Sollie

With its open construction and contemporary profile, few would guess that this contemporary park bench has a long history. Based on the iconic Swedish spindle-back bench, Gard transforms a classic shape into a statement-making design. Many of the traditional wooden parts have been replaced by robust metal wires that form the backrest and legs. The wooden seat is crafted from smooth lengths, and so are the wooden parts in the armrests. The bench's open construction and slated seat enables water to run off quickly. Gard is an all-weather design suited to a wide variety of indoor and outdoor settings.

Can be treated with Protega Novatherm fire protection, which is a waterborne fire protection paint, for products which, for example, will be placed in connection with escape routes and entrances.

CERTIFICATION


Produkt listad i Svanens Husportal   **SundaHus**



Designed for accessibility



Can be treated with fire protection

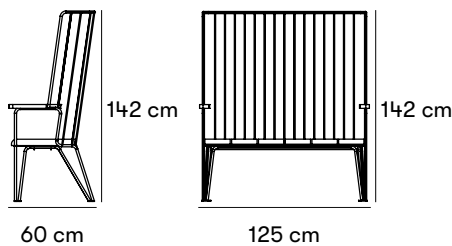

Dimensions and weight

Length: 120 cm
 Height: 137,5 cm
 Armrest height: 70 cm
 Sitting height: 45 cm
 Depth: 58 cm
 Vikt: 40kg

Product numbers and combinations

U33-10 Gard park bench, Accoya
 B11-06 Additional fee for choosing a non-standard colour on steel

Append to product number

WOOD AND FINISH

SIOO for sioo:x treatment oak.
 ACC for accoya.

METAL SURFACE FINISH

R for red RAL 3016.
 S for black RAL 9005.
 GR for grey, GRIS 2150 Sablé.
 C for choice of non-standard colour, additional fee is added.

VARIANTS

Can be treated with fire protection, at additional cost.
 For fire protection treatment contact Nola.

INSTALLATION TYPE

N for surface mount.

Standard colours



Materials and surface treatments

Oak

Oak is a heavy, hard and medium tough wood. Moderately dimensionally stable in case of moisture changes. Oak wood blackens if it is exposed to moisture or wetness for a long time. However, it does not affect the other properties of the wood. Thanks to its hardness and toughness, the oak wood is suitable for furniture and other use in exposed environments.

Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

Accoya

Accoya® wood is the result of more than 80 years of research and development into modifying wood through an acetylation process. Accoya® wood is Radiata pine, a fast-growing wood virtually free of knots that is harvested from renewable FSC-certified forests. Accoya® wood has properties that match or exceed those of tropical woods and the treatment process is non-toxic. The pale wood will turn grey over time and may develop dark spots over time. Accoya® can withstand humid and rainy environments very well and expands/contracts less than other tropical-type woods.

SiOO:X treatment

Sioo:x is a wood protection with environmentally friendly silicon technology. Water-based and biocide-free. We use Sioo mainly for our oak furniture. Sioo:x treatment of is suitable for all woods, outside as well as inside, and gives a light surface without pigments. The surface is UV-resistant, water-repellent and non-stick. Active and preventive action against algae, mould and pests. Also rot-proof, wood-strengthening and fire-retardant. This wood protection provides long durability and easy maintenance.

Powder coating

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

Electrogalvanized

Electrogalvanizing (also known as zinc plating) provides corrosion protection through the sacrifice of zinc ions. It is created via a zinc coating on the steel using an electric current.

Assembly and placement

Freestanding

Freestanding product that is placed directly on the ground.

Surface mount

Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

Delivered fully assembled, ready to be attached to the surface. Bolts not included.

Maintenance

SiOO:X treatment oak

Sioo:x-treated products are treated twice upon delivery; once with a wood protection (Premium Träskydd Altan) and once with a surface protection (Premium Ytskydd Altan). Directly after a product has been installed, it should be treated once more with Sioo:x Premium Surface Protection Altan for best durability. After that, every 12 months. The surface protection forms a wear surface, which means that products that are exposed to severe mechanical wear may need to be treated more often than every ten years. The surface treatment has a tested effect according to the standards EN 46 and EN 113.

For information about the Sioo treatment see the website www.sioox.se.

Accoya

Accoya is maintenance-free and does not require any special treatment to preserve its unique properties. If black spots should appear on the wood from pollution in the air, these are easily removed with any kind of furniture wash.

Powdercoated steel

Products that are powder-coated can be touch-up painted with alkyd paint.

Read more in our general maintenance advice at nola.se/en/care-and-maintenance

Character

Contemporary bench with an open construction and slated seat, design suited to a wide variety of indoor and outdoor settings.

Designers

Odin Sollie

Odin Sollie works full time for Nola as an industrial designer, product developer and constructor. Sollie's main interest within the field is to work towards sustainable development and plastic-free, analog solutions.



