

nola®



A-bench Bench

Design Scaffidi; Antonio

Like a steady A with both feet on the ground. Classic but at the same time contemporary Danish design. Simple load-bearing elements in sand-cast aluminum contrast nicely with the softly rounded seat boards in wood. The wide armrest enhances the feeling of power from the ground and provides good grip and support. We cast in recycled aluminium.


Can be treated with Protega Novatherm fire protection, which is a waterborne fire protection paint, for products which, for example, will be placed in connection with escape routes and entrances.

CERTIFICATION

Produkt listad i
Svanens Husportal



Can be treated with fire protection

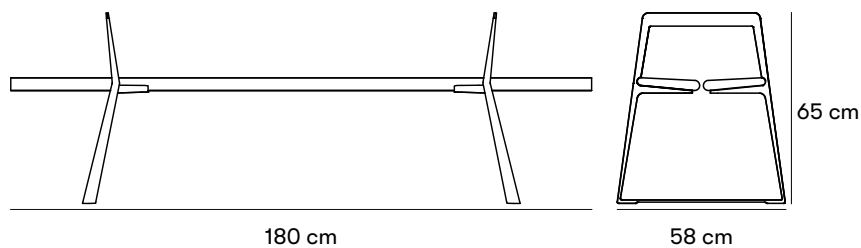

Dimensions and weight

Length: 180 cm
Width: 58/ 44,5 cm
Height: 65 cm
Sitting height: 42,5 cm

Product numbers and combinations

U13-37 A-bench bänk

Append to product number

WOOD AND FINISH

EK for oiled oak.

MH for oiled mahogany.

VARIANTS

Can be treated with fire protection, at additional cost.

For fire protection treatment contact Nola.

INSTALLATION TYPE

N for surface mount.

Standard colours

Materials and surface treatments

The side supports are crafted in cast, sandblasted 100% recycled aluminium. The seat is made in oak, or alternatively, mahogany.

Recycled sand cast aluminium

Aluminium recycled from scrap, hand cast in sand moulds. The energy consumption when producing recycled aluminium is about 5% of that used when producing virgin aluminium.

Mahogany - FSC-certified

FSC-marked mahogany is a wood with good durability in the outdoor environment. In addition, it retains its color tone better than, for example, oak and teak. Mahogany lives and moves, sometimes more than teak.

Oak

Oak is a heavy, hard and medium tough wood. Moderately dimensionally stable in case of moisture changes. Oak wood blackens if it is exposed to moisture or wetness for a long time. However, it does not affect the other properties of the wood. Thanks to its hardness and toughness, the oak wood is suitable for furniture and other use in exposed environments.

Wood oil

Wood oil provides good protection against the stresses of the outdoor climate and at the same time highlights the wood's natural appearance and properties.

Assembly and placement

Freestanding

Freestanding product that is placed directly on the ground.

Surface mount

Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

Delivered fully assembled.

Maintenance

Oiled oak

Oiled oak should be oiled twice a year for best protection. Good maintenance can never completely prevent stains from occurring, but oak that is not maintained will turn blacker and turn gray faster, but it still has a very long life. When re-oiling products, a finely boiled oil that penetrates the wood should be chosen over a film-forming oil.

Oiled mahogany

Oiled mahogany should be oiled two times a year.

Sand cast aluminium

Maintenance on aluminium is not normally needed, but make sure to wash and keep the material clean. Untreated aluminium develops a matte surface over time.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

Versions

Oak or mahogany.

Character

A simple bench with a striking profile.

Designers

Antonio
Scaffidi



