


nola®



Ackord Bollard

Design Veikko Keränen

Ackord was designed by a sculptor, which is why its shape resembles a contemporary artwork. Ackord's solid mass and striking geometric shape brings art and design together in a practical barrier for urban spaces. Ackord is a natural fit for contemporary architecture and a perfect complement to new infrastructure developments.

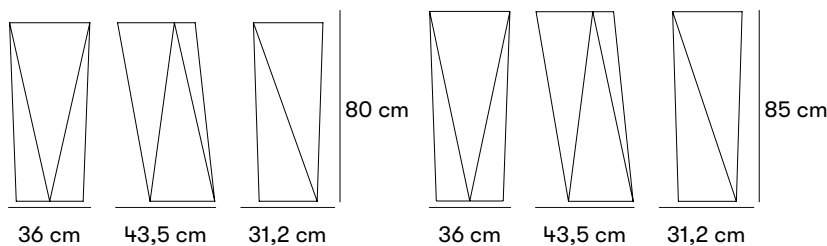

Dimensions and weight

Concrete

Height: 80 cm above ground. 120 cm total height. Width: 36 cm. Depth: 43.5 cm
Length: 31.2 cm.

Weight: 160 kg in Concrete.

Sandcast Aluminum

Height: 85 cm above ground. 121 cm total height. Width: 36 cm. Depth: 43.5 cm
Length: 31.2 cm.

Weight: 40 kg in Sandcast Aluminium.

Product numbers and combinations

Ö16-80G Ackord bollard, concrete coloured in standard grey

Ö16-80A Ackord bollard, concrete coloured in anthracite grey

Ö16-80SA Ackord bollard, sandcasted aluminium

Ö16-80SAG Ackord bollard, sandcasted aluminium powder-coated anthracite grey, Gris 2900 Sablé

Append to product number

METAL SURFACE FINISH

SA for Sandcasted aluminium.

SAG for Sandcasted aluminium powder-coated anthracite grey, Gris 2900 Sablé.

C for any color other than standard, starting cost is added.

VARIANTS





G for Concrete coloured in standard grey.

A for Concrete coloured in anthracite grey.

INSTALLATION TYPE

M for in-ground.

Standard colours

-  Gris 2900 Sablé
-  Sandgjuten återvunnen aluminium
-  Infärgad antracitgrå betong
-  Ljust grå betong ofärgad

Materials and surface treatments

Reinforced concrete, natural grey, or colour pigments, or in sand cast aluminum, uncoloured or lacquered.

Recycled sand cast aluminium

Aluminium recycled from scrap, hand cast in sand moulds. The energy consumption when producing recycled aluminium is about 5% of that used when producing virgin aluminium.

Powder coating

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

Concrete

Concrete is cement mixed with crushed stone or aggregate. The material is very strong in compression but fragile in tension. To compensate for this concrete can be reinforced, often with steel.

Coloured concrete

Colored concrete is concrete in a color other than standard grey. Pigment is added to the dry mixture, which means that the concrete becomes coloured throughout. Each color has its own recipe.

Assembly and placement

In-ground

Cast in ground.

Maintenance

Sand cast aluminium

Maintenance on aluminium is not normally needed, but make sure to wash and keep the material clean. Untreated aluminium develops a matte surface over time.

Powder coated Aluminium

Products that are powder-coated can be touch-up painted with alkyd paint if necessary.

Concrete

Both normal concrete and fibre-reinforced concrete are sensitive to hard edge impacts. A concrete product that has been damaged can be repaired with polyester filler, such as the product "Plastic Padding".

Coloured concrete

Products made of coloured concrete are washed with a pressure sprayer at low pressure. Damaged products can be repaired with a repair kit that is available to order.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

Versions

Available in a natural grey concrete finish or blended with colour pigments to create an anthracite colour throughout. Also available in sand cast aluminium, uncoloured or lacquered in graphite gray Gris 2900 Sablé.

Character

This bollard's solid mass and eye-catching geometric shape brings art and design together in a practical barrier for public spaces.

Designers

Veikko Keränen

