


nola®



## Bocks Planter

### Design Nola

Bocks is designed to be big and heavy, enabling it to be used as a pedestrian barrier or to block vehicle access. Bock's efficient design brings large-sized planters within reach of a wider range of commercial developments and urban planning schemes. Despite its substantial size, heavy-duty machinery is not needed to install this planter. Bock can be lifted and lowered into place by a forklift truck.

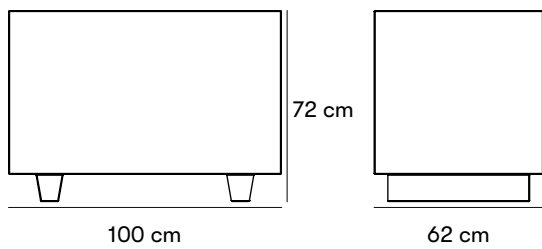

#### Dimensions and weight

Length: 100 cm

Width: 62 cm

Height: 72 cm

Weight 400 kg

Volume: 218 L

#### Product numbers and combinations

Ö16-14 Bocks planter

Ö16-41 Anchoring bolt M20, flat steel hardware

Ö16-14BV Water tank 8,5 liter

#### Append to product number

#### VARIANTS


A for through-dyed concrete anthracite grey


G for gray concrete uncoloured

#### INSTALLATION TYPE

N for surface mount.

#### Standard colours

 Infärgad antracitgrå betong

 Ljust grå betong ofärgad

#### Materials and surface treatments

Reinforced concrete.

#### Concrete

Concrete is cement mixed with crushed stone or aggregate. The material is very strong in compression but fragile in tension. To compensate for this concrete can be reinforced, often with steel.

#### Coloured concrete

Colored concrete is concrete in a color other than standard grey. Pigment is added to the dry mixture, which means that the concrete becomes coloured throughout. Each color has its own recipe.

#### Assembly and placement

#### Freestanding

Freestanding product that is placed directly on the ground.

**Surface mount**

Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

Fully assembled.

Freestanding. The planter should be put in position by a forklift truck.

**Maintenance**

Maintenance not normally required.

**Concrete**

Both normal concrete and fibre-reinforced concrete are sensitive to hard edge impacts. A concrete product that has been damaged can be repaired with polyester filler, such as the product "Plastic Padding".

**Coloured concrete**

Products made of coloured concrete are washed with a pressure sprayer at low pressure. Damaged products can be repaired with a repair kit that is available to order.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

**Versions**

Available in a natural concrete finish or anthracite-coloured concrete.

**Character**

Despite its substantial size, heavy-duty machinery is not needed to install this planter. Bock can be lifted and lowered into place by a forklift truck.

**Designers**

---

**Nola**

---

