



nola®

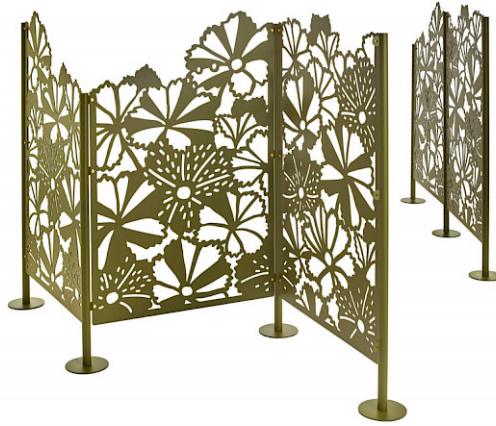

Daggkåpa Outdoor Screen and Space Divider

Design Eva Schildt

Daggkåpa is an outdoor screen system and space divider that can be installed in a range of configurations. The supporting posts are available in two heights, and the screens can be installed at several angles. Daggkåpa is designed with flexibility in mind, creating an adaptable screen that is quick to install and easy to enjoy. Daggkåpa can be bolted to the ground to provide additional stability. The motif on Daggkåpa's panels was inspired by the leaves of the Lady's Mantle plant.

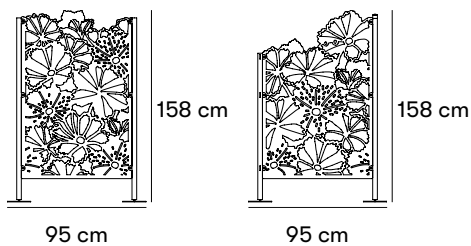

Dimensions and weight

Width: 95 cm
 Height: 158 cm/ 128 cm
 Height high post: 160 cm
 Low post: 130 cm
 Screen width: 95 cm + Post 4 cm

Product numbers and combinations

Ö05-01 Daggkåpa, outdoor screen panel with horizontal top edge
 Ö05-02 Daggkåpa, outdoor screen panel with sloping top edge
 Ö05-03H Daggkåpa, end-post height 156 cm
 Ö05-03HD/180 Daggkåpa, mid-post 180° turn height 156 cm
 Ö05-03HD/90 Daggkåpa, mid-post 90° turn height 156 cm
 Ö05-03L Daggkåpa, end-post height 126 cm
 Ö05-03LD/180 Daggkåpa, mid-post 180° turn height 126 cm
 Ö05-03LD/90 Daggkåpa, mid-post 90° turn height 126 cm

Append to product number

METAL SURFACE FINISH

C for any other color than standard, start up fee is added.

INSTALLATION TYPE

M for in-ground.
 N for surface mount.

Standard colours

■ VERT 2100 Sablé YW381I

Materials and surface treatments

Powder-coated steel
 Standard color: Green VERT 2100 Sablé YW381L
 Other colors are available for an extra cost.

Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

Powder coating

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

Electrogalvanized

Electrogalvanizing (also known as zinc plating) provides corrosion protection through the sacrifice of zinc ions. It is created via a zinc coating on the steel using an electric current.

Assembly and placement

In-ground

Cast in ground.

Surface mount

Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

Skärmar och stolpar levereras för slutmontage på plats.

Maintenance

Powdercoated steel

Products that are powder-coated can be touch-up painted with alkyd paint.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

Versions

Can be installed in a range of heights and configurations. The supporting posts are available in two heights, and the screens can be installed at 90-degree angles.

Character

Daggkåpa is a flexible screen and spacedividing system that can be installed in a range of heights and configurations.

Designers

Eva Schildt



