


nola®



## Ekeberg Bike Stand

Design Klock & Sæther

Ekeberg enables individual bicycles to be parked in place and held upright. Ekeberg's frame can hold the bicycle's front wheel securely, while also providing an upright post where the bicycle frame can be securely locked. An excellent choice for contemporary settings, Ekeberg's design enables bicycles to stand neatly in place.

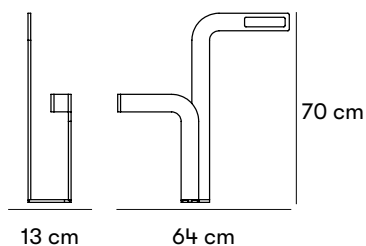

#### Dimensions and weight

Width: 13 cm

Height: 70 cm

Depth: 64 cm

Weight 9 kg

#### Individual dimensions

Manufactured in 10 mm sheet steel

The foot plate has two countersunk holes for M10

#### Product numbers and combinations

**Ö04-25S** Ekeberg bicycle stand in 10 mm sheet steel with footplate in standard colour Jet Black RAL 9005

**Ö04-25MU** Ekeberg steel anchor for ground mount version, to be added to the bicycle rack

**B11-06** Startup cost for powder coating steel in a color other than standard. Choose a RAL colour.

#### Append to product number

##### METAL SURFACE FINISH

C for any color other than standard, starting cost is added.

##### INSTALLATION TYPE

M for in-ground.

N for surface mount.

#### Standard colours



RAL 9005

#### Materials and surface treatments

##### Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

##### Hot-dip galvanized

Hot-dip galvanizing provides very strong protection against corrosion. The steel is dipped into a bath of hot liquid zinc. The zinc attaches and creates a surface coating on the steel part, which is then taken out of the bath and drained of excess zinc.

#### **Powder coating**

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

#### **Assembly and placement**

##### **In-ground**

Cast in ground.

##### **Surface mount**

Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

Fully assembled

#### **Maintenance**

##### **Powdercoated steel**

Products that are powder-coated can be touch-up painted with alkyd paint.

##### **Hot dip galvanized steel**

Hot-dip galvanized can be touch-up painted with so-called "cold galvanizing".

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

#### **Versions**

Standard colour black RAL 9005.

Other colours are available for an additional fee.

#### **Character**

Ekberg's frame forms a slot that holds the bicycle's front wheel securely, with an upright post where the bicycle frame can be securely locked.

#### **Designers**

Klock & Sæther



