


nola®



Ekeberg Bike Stand

Design Klock & Sæther

Ekeberg enables individual bicycles to be parked in place and held upright. Ekeberg's frame can hold the bicycle's front wheel securely, while also providing an upright post where the bicycle frame can be securely locked. An excellent choice for contemporary settings, Ekeberg's design enables bicycles to stand neatly in place.

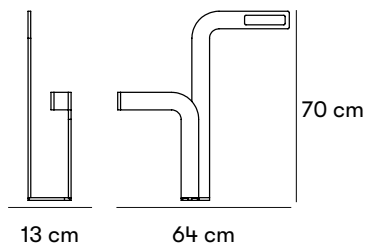

Dimensions and weight

Width: 13 cm
 Height: 70 cm
 Depth: 64 cm
 Vikt: 9 kg

Individual dimensions

Manufactured in 10 mm sheet steel
 The foot plate has two countersunk holes for M10

Product numbers and combinations

Ö04-25S Ekeberg bicycle stand in 10 mm sheet steel with footplate in standard colour Jet Black RAL 9005

Ö04-25MU Ekeberg steel anchor for ground mount version, to be added to the bicycle rack

B11-06 Startup cost for powder coating steel in a color other than standard. Choose a RAL colour.

Append to product number

METAL SURFACE FINISH

C for any color other than standard, starting cost is added.

INSTALLATION TYPE

M for in-ground.

N for surface mount.

Standard colours

■ RAL 9005

Materials and surface treatments

Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

Zinc powder primer

It's a thermosetting epoxy powder coating primer that can be applied on several type of metal substrates such as aluminium, steel or galvanised steel. This primer has a robust curing window, allowing excellent inter coat adhesion in direct fired ovens and gives very good edge coverage and superior corrosion protection.

Powder coating

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

Assembly and placement

In-ground

Cast in ground.

Surface mount

Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

Fully assembled

Maintenance

Powdercoated steel

Products that are powder-coated can be touch-up painted with alkyd paint.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

Versions

Standard colour black RAL 9005.

Other colours are available for an additional fee.

Character

Ekberg's frame forms a slot that holds the bicycle's front wheel securely, with an upright post where the bicycle frame can be securely locked.

Designers

Klock & Sæther



