

nola®




## Goal Park Bench

Design Thomas Bernstrand

The reinforced fibre concrete surfaces of the Goal park bench make it an ideal choice for outdoor environments, yet it is also an attractive complement to hi-tech interiors. The surfaces are anchored to a pair of stainless steel runners to create a strong and stable base. The blend of untreated stainless steel and polished concrete gives Goal an architectonic effect that mirrors the simplicity of many architectural styles.

CERTIFICATION



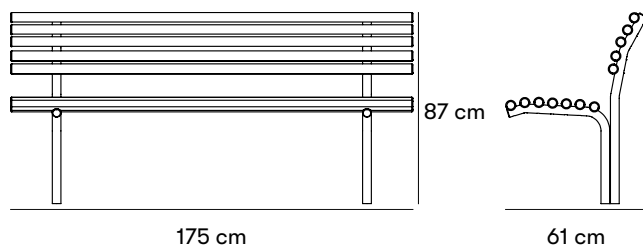

#### Dimensions and weight

Length: 175 cm  
Width: 61 cm  
Height: 87 cm  
Sitting height: 46 cm

Weight: 45 kg. (pine: 32 kg)

#### Individual dimensions

Stand steel pipe: dimensions: 38 x 2 mm, hot-dip galvanized.

Seat and back: Polyurethane-coated steel pipes 30 x 2 mm, with the PUR molding Ø 44 mm. Alternatively, pine slats 40 x 50 mm.

Top-glazed pine: GORI 890 Flint.

#### Product numbers and combinations

U07-25 Goal Park Bench without armrest in Vfz, black.

U07-26 Goal Park Bench with armrest in Vfz, black.

U07-42 Goal attachment hardware, set of 4 pieces

#### Append to product number

##### INSTALLATION TYPE

M for in-ground.

N for surface mount.

#### Standard colours

■ RAL 9005

#### Materials and surface treatments

Polyurethane.

##### Pine

Nola's pine is of high quality and comes from sustainable forestry. Pine is an environmentally friendly, domestically produced material. Damaged or untreated pine is quite easily attacked by decomposition processes; therefore, it is particularly important to repair damaged surfaces.

##### Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

**Hot-dip galvanized**

Hot-dip galvanizing provides very strong protection against corrosion. The steel is dipped into a bath of hot liquid zinc. The zinc attaches and creates a surface coating on the steel part, which is then taken out of the bath and drained of excess zinc.

**Water-based glaze**

Varnishing of wood is done with a water-based varnish. A water-based paint that is kinder to the environment. Under normal use, the paint has a good wear resistance and long durability.

**Assembly and placement****Freestanding**

Freestanding product that is placed directly on the ground.

**In-ground**

Cast in ground.

**Surface mount**

Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

Delivered in parts for assembly on site.

**Maintenance**

Scratched steel can be treated with galvanised metal primer. The wooden slats may be cleaned with mild detergents as needed. Glazed pine can be repainted if needed.

**Water-based glazed pine**

Products in varnished pine must be maintained regularly with alkyd paint. Maintenance intervals approximately 1 time per year. Damage and cracks should be repaired immediately. Touch-up paints in spray packaging are available in standard colors to order.

**Hot dip galvanized steel**

Hot-dip galvanized can be touch-up painted with so-called "cold galvanizing".

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

**Versions**

Standard colors in: black-grey NCS 8502-B, green NCS S 8010-G10Y and reddish-brown NCS S 4550-Y80R. Pine in GORI 890 Flint.

**Character**

Goal's reinforced fibre concrete surface makes it an ideal choice for outdoor environments, yet it is an attractive complement to hi-tech interiors too.

### Thomas Bernstrand

Designer Thomas Bernstrand, who owns his own design studio in Stockholm, has participated in a large number of design and art exhibitions around the world such as MoMA in New York, Colette in Paris, Biennale Design Saint-Etienne and others.

Bernstrand has received several awards for his work, including Excellent Swedish Form and Winner of the Good Design Award 2012 for Nolastolen Share. For Nola, Bernstrand has designed a large number of products and furniture series and participated in a number of special projects over the years.

