

# nola®




## Goggle 2 Bike Stand

### Design Nola

The Goggle bike stand is an efficient combination of metal rings and freestanding poles. Sleek metal rings at the top provide fixtures where bicycles can be securely locked. The bicycle stands can be positioned in a long row or arranged in curving shapes to complement the landscape around them. This bike stand can be used on its own or as an efficient complement to the Goggle 2 system.

#### CERTIFICATION



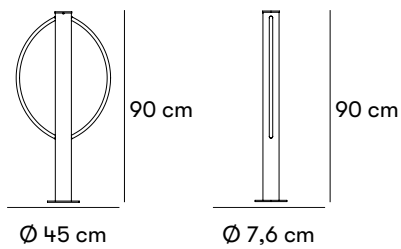

#### Dimensions and weight

Height: 90 cm  
 Ø: 45 cm

#### Individual dimensions

Post: Ø 76 mm  
 Frames: Ø 16 mm bent wire  
 Footplate: Ø 150 mm

#### Product numbers and combinations

Ö03-43 Goggle 2 bicycle stand

#### Append to product number

#### METAL SURFACE FINISH

VFZ for bollards in hot-dip galvanized design.  
 C for any color other than standard, starting cost is added.

#### INSTALLATION TYPE

M for in-ground.  
 N for surface mount.

#### Standard colours

- RAL 9005
- Gris 2900 Sablé
- Gris 2150 Sablé
- Hot-dip galvanized steel

#### Materials and surface treatments

#### Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

#### Hot-dip galvanized or electrogalvanized and powder coating

Available in either only hot-dip galvanized steel or electro-galvanized and powder-coated steel.

Hot-dip galvanizing provides very strong protection against corrosion. The steel is dipped into a bath of hot liquid zinc. The zinc attaches and creates a surface coating on the steel part, which is then taken out of the bath and drained of excess zinc.

Electrogalvanizing provides corrosion protection through the sacrifice of zinc ions. It is created via a zinc coating on the steel using an electric current. Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike

conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

#### Assembly and placement

##### In-ground

Cast in ground.

##### Surface mount

Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

#### Maintenance

##### Powdercoated steel

Products that are powder-coated can be touch-up painted with alkyd paint.

##### Hot dip galvanized steel

Hot-dip galvanized can be touch-up painted with so-called "cold galvanizing".

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

#### Character

New variant of Goggle bicycle bollard with larger arch, for smooth frame locking.

#### Designers

---

#### Nola

---

