




Island Bench

Design Färg & Blanche

The Island furniture group challenges the traditional and rectangular bench table with its organic and asymmetrical shapes. Tables and benches with varying widths on the sides bring out a sense of playfulness in the arrangement while inviting people to sit in various ways. By placing multiple tables lengthwise, seating arrangements can be created where everyone can see each other.

The furniture is crafted from wood and hot-dip galvanized steel and can be purchased individually, with or without armrests on the sofa and bench, as well as in groups. The pieces are cast or bolted to the ground.

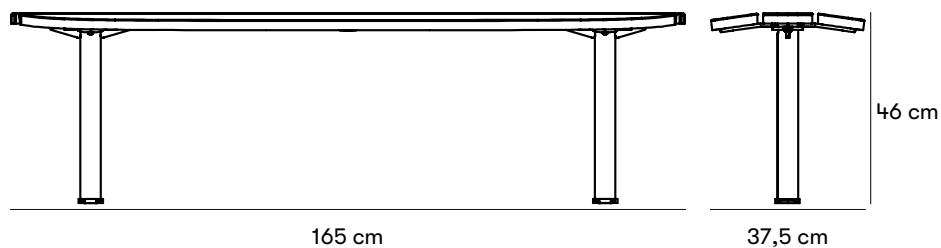

Dimensions and weight

Length: 165 cm
 Height: 64,5 cm
 Armrest height: 18,5 cm
 Sitting height: 46 cm
 Depth: 37,5 cm
 Weight 18,5 kg

Product numbers and combinations

U17-50 Island Bench

Append to product number

WOOD AND FINISH

E for oiled oak.

METAL SURFACE FINISH

RAL 7022

C for any color other than standard, starting cost is added.

VARIANTS

A for bench with armrests.

INSTALLATION TYPE

M for in-ground.

N for surface mount.

Standard colours



Materials and surface treatments

Oak

Oak is a heavy, hard and medium tough wood. Moderately dimensionally stable in case of moisture changes. Oak wood blackens if it is exposed to moisture or wetness for a long time. However, it does not affect the other properties of the wood. Thanks to its hardness and toughness, the oak wood is suitable for furniture and other use in exposed environments.

Wood oil

Wood oil provides good protection against the stresses of the outdoor climate and at the same time highlights the wood's natural appearance and properties.

Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

Hot-dip galvanized

Hot-dip galvanizing provides very strong protection against corrosion. The steel is dipped into a bath of hot liquid zinc. The zinc attaches and creates a surface coating on the steel part, which is then taken out of the bath and drained of excess zinc.

Powder coating

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

Assembly and placement

In-ground

Cast in ground.

Surface mount

Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

Maintenance

Oiled oak

Oiled oak should be oiled twice a year for best protection. Good maintenance can never completely prevent stains from occurring, but oak that is not maintained will turn blacker and turn gray faster, but it still has a very long life. When re-oiling products, a finely boiled oil that penetrates the wood should be chosen over a film-forming oil. Black stains on oiled oak can be removed with oxalic acid.

Powdercoated steel

Products that are powder-coated can be touch-up painted with alkyd paint.

[Read more in our general maintenance advice at \[nola.se/en/care-and-maintenance\]\(https://nola.se/en/care-and-maintenance\)](https://nola.se/en/care-and-maintenance)

Färg & Blanche

Since Fredrik Färg and Emma Marga Blanche made their debut on the Swedish design scene around 2010, they have been a prominent name among the country's leading designers. Their products are represented by major furniture manufacturers, and their experimental ideas are well-documented in exhibitions, museums, and writings. Island is their first product for Nola, born from a site-specific installation in Sundbyberg, Stockholm.

