

nola®



## Kajen Sun Lounger

Design Thomas Bernstrand

Crafted in a sweeping shape that balances atop a streamlined frame, the Kajen sun lounger is made with maximum comfort in mind. One of the first park benches to be accompanied by a footrest, the design invites those seated to put their feet up, or just sit back and relax. Kajen sun is durable. The laid-back luxury of this sun lounger and footrest will make a unique addition to any public space.


The variants of Kajen Sun Lounger made in Linux-impregnated pine and hot-dip galvanized steel are certified with the [Nordic Swan Ecolabel](#).

### CERTIFICATION

Produkt listad i  
Svanens Husportal



 **SundaHus**

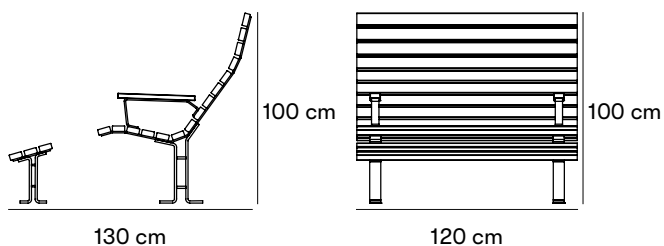

#### Dimensions and weight

Width: 120/180/300 cm  
 Height: 103,4 cm  
 Sitting height: 43 cm  
 Depth: 83,6 cm / 131,9 cm

#### Individual dimensions

The steel plate in the seat frame, footrest supports and mid-section: 8 mm x 60 mm

Arm rest in bent flat steel: 8 x 40 mm

The armrests are made in steel plate: 12 mm x 60 mm

Wood components: Seat and backrest: 56 mm x 26 mm

#### Product numbers and combinations

U16-85/120 Kajen Sun Lounger 120cm

U16-86/120 Kajen Footrest 120cm

U16-85/180 Kajen Sun Lounger 180cm

U16-86/180 Kajen Footrest 180cm

U16-85/300 Kajen Sun Lounger 300cm

U16-86/300 Kajen Footrest 300cm

U16-87/120 Kajen Sun Lounger 120cm extended

U16-87/180 Kajen Sun Lounger 180cm extended

U16-87/300 Kajen Sun Lounger 300cm extended

U16-85-3 KAJEN single armrest for sun lounger

U16-85-3 KAJEN single armrest for sun lounger

B11-06 Startup cost for powder coating steel in a color other than standard.  
 Choose a RAL colour.

B11-07 Starting cost for another color of wood. Choose brown or grey for Linax or an NCS color for painted wood. If you want the same color on both steel and wood, choose the RAL color for both.

#### Append to product number

##### WOOD AND FINISH

EK for oiled oak.

SIOO for sioo:x treatment oak.

MH for oiled mahogany.

LIN for linax impregnated pine.

NCS S 0502-Y for top-glazed white pine.

NCS S5502-B for top-glazed light gray pine.

C for any color top-glazed pine, at additional cost.

##### METAL SURFACE FINISH

Noir 2200 Sablé for black.  
C for any color other than standard, at additional cost.  
VFZ for hot-dip galvanized steel.






#### VARIANTS

Nordic Swan Ecolabel applies exclusively for hot-dip galvanized steel and Linax treated pine. Not available for wall-mounted Mini-Bench, Rocking Chair and Standing Bench.

#### INSTALLATION TYPE

N for surface mount.

#### Standard colours

	NCS S 5502-B
	NCS S 0502-Y (Vit)
	Noir 2200 Sablé
	Linax impregnated natural
	Hot-dip galvanized steel

#### Materials and surface treatments

Allt stål är som standard elförzinkat, gulkromade och pulverlackerade i Noir 2200 Sablé. Finns att få i varmförzinkat stål. Svanenmärkning gäller enbart varmförzinkat stål och Linaximpregnerad furu.

Träribborna i sits och ryggstöd finns att få i Linaximpregnerad furu, oljad FSC-certifierad mahogny, oljad ek, Sioo-behandlad ek eller målad furu. Standardfärg på målad furu är vit NCS 0502-Y eller ljusgrå NCS S 5502-B.

#### Pine

Nola's pine is of high quality and comes from sustainable forestry. Pine is an environmentally friendly, domestically produced material. Damaged or untreated pine is quite easily attacked by decomposition processes; therefore, it is particularly important to repair damaged surfaces.

#### Mahogany - FSC-certified

FSC-marked mahogany is a wood with good durability in the outdoor environment. In addition, it retains its color tone better than, for example, oak and teak. Mahogany lives and moves, sometimes more than teak.

#### Oak

Oak is a heavy, hard and medium tough wood. Moderately dimensionally stable in case of moisture changes. Oak wood blackens if it is exposed to moisture or wetness for a long time. However, it does not affect the other properties of the wood. Thanks to its hardness and toughness, the oak wood is suitable for furniture and other use in exposed environments.

#### Linax

After traditional impregnation according to NTR AB, the wood is boiled in a hot linseed oil with or without color pigments under vacuum. The oil is penetrated into the surface on all six sides, which reduces moisture absorption in the wood and gives a dimensionally stable product over time. The result is a dried product with good resistance to rot that also has long maintenance intervals. Linax-impregnated furniture is intended for outdoor environments only.

#### **SiOO:X treatment**

SiOO:x is a wood protection with environmentally friendly silicon technology. Water-based and biocide-free. We use SiOO mainly for our oak furniture. SiOO:x treatment of is suitable for all woods, outside as well as inside, and gives a light surface without pigments. The surface is UV-resistant, water-repellent and non-stick. Active and preventive action against algae, mould and pests. Also rot-proof, wood-strengthening and fire-retardant. This wood protection provides long durability and easy maintenance.

#### **Wood oil**

Wood oil provides good protection against the stresses of the outdoor climate and at the same time highlights the wood's natural appearance and properties.

#### **Water-based glaze**

Varnishing of wood is done with a water-based varnish. A water-based paint that is kinder to the environment. Under normal use, the paint has a good wear resistance and long durability.

#### **Steel**

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

#### **Hot-dip galvanized or electrogalvanized and powder coating**

Available in either only hot-dip galvanized steel or electro-galvanized and powder-coated steel.

Hot-dip galvanizing provides very strong protection against corrosion. The steel is dipped into a bath of hot liquid zinc. The zinc attaches and creates a surface coating on the steel part, which is then taken out of the bath and drained of excess zinc.

Electrogalvanizing provides corrosion protection through the sacrifice of zinc ions. It is created via a zinc coating on the steel using an electric current. Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

### **Assembly and placement**

#### **Surface mount**

Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

Some assembly required. The seat, mid-section and footrest are delivered pre-attached to the steel plate. The seat and footrest bolt to the legs with the bolts provided.

### **Maintenance**

Finstruktur SK 1. Pulverlack går att beställa på sprayflaska.

#### **Powdercoated steel**

Products that are powder-coated can be touch-up painted with alkyd paint.

#### **Hot dip galvanized steel**

Hot-dip galvanized can be touch-up painted with so-called "cold galvanizing".

#### **Oiled oak**

Oiled oak should be oiled twice a year for best protection. Good maintenance can never completely prevent stains from occurring, but oak that is not maintained will turn blacker and turn gray faster, but it still has a very long life. When re-oiling products, a finely boiled oil that penetrates the wood should be chosen over a film-forming oil.

#### **Oiled mahogany**

Oiled mahogany should be oiled two times a year.

#### **Linax impregnated pine**

Linax is a linseed oil-based impregnation that provides extra long durability in outdoor environments and corresponds to impregnation class AB. The impregnated wood turns gray over time, which means that it should be re-oiled if necessary. Use a linseed-based oil for impregnated materials.

#### **SiOO:X treatment oak**

Sioo:x-treated products are treated twice upon delivery; once with a wood protection (Premium Träskydd Altan) and once with a surface protection (Premium Ytskydd Altan). Directly after a product has been installed, it should be treated once more with Sioo:x Premium Surface Protection Altan for best durability. After that, every 12 months. The surface protection forms a wear surface, which means that products that are exposed to severe mechanical wear may need to be treated more often than every ten years. The surface treatment has a tested effect according to the standards EN 46 and EN 113.

For information about the Sioo treatment see the website [www.sioox.se](http://www.sioox.se).

#### **Water-based glazed pine**

Products in varnished pine must be maintained regularly with alkyd paint. Maintenance intervals approximately 1 time per year. Damage and cracks should be repaired immediately. Touch-up paints in spray packaging are available in standard colors to order.

**Read more in our general maintenance advice at [nola.se/en/care-and-maintenance](http://nola.se/en/care-and-maintenance)**

#### **Versions**

Three standard lengths:  
120 cm, 180 cm and 300 cm.

#### **Character**

A sleek outdoor seat made for relaxing spots where the sunshine or the view can be enjoyed.

## Designers

---

### Thomas Bernstrand

Designer Thomas Bernstrand, who owns his own design studio in Stockholm, has participated in a large number of design and art exhibitions around the world such as MoMA in New York, Colette in Paris, Biennale Design Saint-Etienne and others.

Bernstrand has received several awards for his work, including Excellent Swedish Form and Winner of the Good Design Award 2012 for Nolastolen Share. For Nola, Bernstrand has designed a large number of products and furniture series and participated in a number of special projects over the years.








*Kajen solsoffa med fotstöd i täcklaserad furu. Solsoffan kan beställas med eller utan armstöd.*



*Kajen Solsoffa är ett härligt tillägg till ute kontoret Workout i Växjö. Foto: Jonas Ljungdahl*



*Badhusparken i Vara. Foto: Ulf Celander*

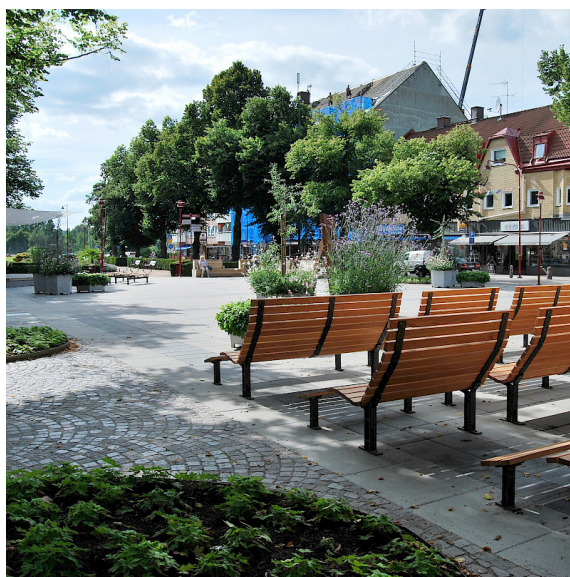

*Kajen solsoffor i blandade längder på plats i Lund.*

