


nola®



## Konkret Seat

Design Åsa Ehn Hillberg

This moulded concrete seat reflects trends in architecture and urban design, making it a perfect match for contemporary settings. The seat's shape has a strong resonance with minimal styles from the Far East. Its low profile and solid form also make it ideal as a boundary marker. Several seats can be positioned to demarcate an area within an outdoor space, or strategically arranged to create a border.

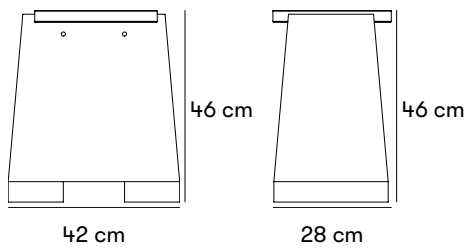

#### Dimensions and weight

Length: 42 cm

Width: 28 cm

Height: 46 cm

Vikt: 80 kg

Dimensions of the seating surface: 30 x 30 cm.

Light gray concrete / Oiled teak alternatively Oiled oak, dimensions: 42 x 142 mm.

#### Product numbers and combinations

U12-00EK Konkret ek

U12-00T Konkret teak

#### Append to product number

##### WOOD AND FINISH

TEA for oiled teak.

EK for oiled oak.

##### INSTALLATION TYPE

N for surface mount.

#### Standard colours

#### Materials and surface treatments

##### Teak - FSC-certified

FSC-labeled teak is exceptionally durable in an outdoor environment. Teak has a high content of silicon and tannic acids, which makes it quite expensive to process. If you want to keep the reddish-brown luster, you should oil the wood several times during a season, otherwise it turns gray quickly.

##### Oak

Oak is a heavy, hard and medium tough wood. Moderately dimensionally stable in case of moisture changes. Oak wood blackens if it is exposed to moisture or wetness for a long time. However, it does not affect the other properties of the wood. Thanks to its hardness and toughness, the oak wood is suitable for furniture and other use in exposed environments.

##### Wood oil

Wood oil provides good protection against the stresses of the outdoor climate and at the same time highlights the wood's natural appearance and properties.

### Concrete

Concrete is cement mixed with crushed stone or aggregate. The material is very strong in compression but fragile in tension. To compensate for this concrete can be reinforced, often with steel.

### Assembly and placement

#### Freestanding

Freestanding product that is placed directly on the ground.

#### Surface mount

Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

Fully assembled.

### Maintenance

#### Oiled oak

Oiled oak should be oiled twice a year for best protection. Good maintenance can never completely prevent stains from occurring, but oak that is not maintained will turn blacker and turn gray faster, but it still has a very long life. When re-oiling products, a finely boiled oil that penetrates the wood should be chosen over a film-forming oil.

#### Oiled teak

Teak should be oiled annually to maintain the brown color. Without maintenance, teak takes on a silver gray color over time.

#### Concrete

Both normal concrete and fibre-reinforced concrete are sensitive to hard edge impacts. A concrete product that has been damaged can be repaired with polyester filler, such as the product "Plastic Padding".

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

### Versions

Seat in oiled oak or oiled teak.

### Character

A moulded concrete seat that reflects trends in contemporary architecture and urban design.

### Designers

---

Åsa Ehn Hillberg



