

nola®




Kyparn Table

Design Johannes Norlander

The Kyparn table can stand outdoors all year, withstanding weather conditions throughout the four seasons. A recess in the centre of the table is designed to hold a candle, while a ring underneath the tabletop functions as a locking device and a hanger. Paired with chairs from the Kyparn furniture group, this table forms an elegant contemporary dining suite for outdoor cafes and indoor dining. The table can be further accessorised with a matching tray and menu holder.

CERTIFICATION

Produkt listad i
Svanens Husportal  **SundaHus**

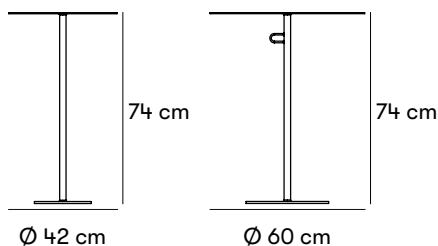

Dimensions and weight

Small Bordet

Tabletop diameter: Ø 42 cm

Height: 74 cm

Base diameter: Ø 25 cm

Weight: 9 kg

Large Bordet

Tabletop diameter: Ø 60 cm

Height: 74 cm

Base diameter: Ø 35 cm

Weight: 12 kg

Individual dimensions

The tabletop is 4 mm thick. The base is 10 mm thick. Center leg Ø 20 x 5 mm

The supporting post's diameter is 20 mm x 5 mm

The menu-holder weighs 0.3 kg

The tray weighs 0.23 kg

The candleholder weighs 0.36 kg

Product numbers and combinations

U11-41 Kyparn table Ø 42 cm

U11-46 Kyparn table Ø 60 cm

U11-42 Kyparn candle-holder

U11-43 Kyparn menu holder

U11-44 Kyparn tray

B11-06 Startup cost for powder coating steel in a color other than standard.

Choose a RAL colour.

Append to product number

METAL SURFACE FINISH

V for white RAL 9010.

A for anthracite RAL 7016.

C for any color other than standard, starting cost is added.

Standard colours



RAL 9010



RAL 7016

Materials and surface treatments

Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

Electrogalvanized

Electrogalvanizing (also known as zinc plating) provides corrosion protection through the sacrifice of zinc ions. It is created via a zinc coating on the steel using an electric current.

Powder coating

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

Assembly and placement

Freestanding

Freestanding product that is placed directly on the ground.

Maintenance

Finstruktur SK 1. Pulverlack går att beställa på sprayflaska.

Powdercoated steel

Products that are powder-coated can be touch-up painted with alkyd paint.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

Versions

The table is made in standard sizes with diameters of 42 cm and 60 cm. The table can be accessorised with a tray, an attachable menu holder or with a candlestick.

Character

Paired with chairs from the Kyparn furniture group, this table forms an elegant contemporary dining suite for outdoor cafes and indoor dining.

Designers

Johannes Norlander



