


nola®



## Darkrail Bike Rack

Design Nola

This illuminating rail is ground-breaking in its combination of practicality, functionality and innovation. Lightrail is made from metal tubes and reinforced plastic containing LED lighting. The LED lighting emanates upwards to subtly illuminate the surrounding area. It provides support for cyclists to lean against or hold on to while waiting at traffic lights. Lightrail casts enough light to be visible from a distance.

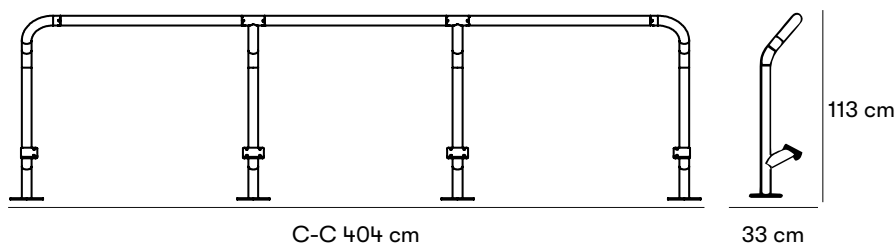

#### Dimensions and weight

Length: Base section C-C 279 cm Build on section C-C 126 cm Depth: 30 cm with foot plate 26 cm without foot plate Total height: 110 cm Height: Centrum foot step 30 cm

#### Individual dimensions

Posts and handrails in  $\varnothing 60 \times 4$  steel tubes

Footrest in bent steel cassette with 3 mm aluminum colander

#### Product numbers and combinations

U02-94: Bassektion (3 stolpar C-C 1395)

U02-94/PÅBYGG: Påbyggnadssektion

#### Append to product number

##### METAL SURFACE FINISH

S for black, Noir 2200 Sablé.

G for grey, Gris 2900 Sablé.


C for any color of steel other than, at additional cost.


##### INSTALLATION TYPE

M for in-ground.

N for surface mount.

#### Standard colours

 Noir 2200 Sablé

 Gris 2900 Sablé

#### Materials and surface treatments

Footrest in bent steel cassette with 3 mm aluminum colander plate.

##### Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

##### Powder coating

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

##### Electrogalvanized

Electrogalvanizing (also known as zinc plating) provides corrosion protection through the sacrifice of zinc ions. It is created via a zinc coating on the steel using an electric current.

## Assembly and placement

### In-ground

Cast in ground.

### Surface mount

Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

Supplied in parts - posts, fluorescent and steps

## Maintenance

### Powdercoated steel

Products that are powder-coated can be touch-up painted with alkyd paint.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

## Character

A bicycle rail that provides support for cyclists to lean against or grip while waiting for traffic lights to change, and enough light to make traffic intersections visible.

## Designers

---

## Nola

