

nola®




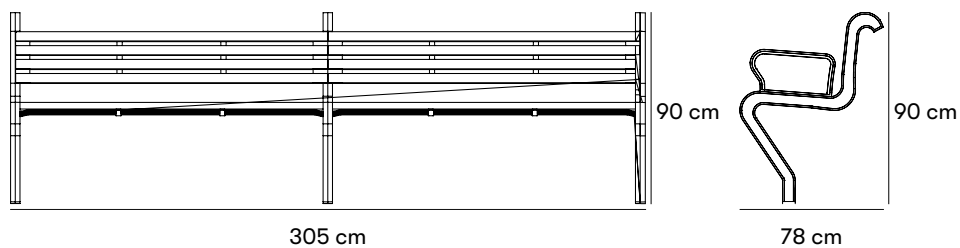
Long Park Bench

Design 02landskap

Long is a versatile park bench that can be produced in any length. Designed in modular sections, Long was developed in response to urban areas where longer benches are needed. Long can run the full length of an outdoor square, a sports pitch or waterfront park, or be installed in lateral spaces such as transport terminals. Long is also a popular choice for historical settings and conservation areas.

FEATURES

 Designed for accessibility



Dimensions and weight

Length: Startsektion 155 cm. Påbyggnadssektion 150 cm
 Height: 90 cm
 Armrest height: 70 cm
 Sitting height: 47 cm
 Depth: 78 cm

 Depth: 78 cm
 Seat height: 91 cm
 Length of core module: 155 cm
 Modular section: 150 cm

Product numbers and combinations

U17-10 Long soffa startsektion
 U17-11 Long soffa påbyggnadssektion utan armstöd
 U17-12 Long soffa påbyggnadssektion med armstöd

Append to product number

WOOD AND FINISH

NCS S 5502-B for topcoated pine in grey.
 C for any color other than standard, starting cost is added.

METAL SURFACE FINISH

RAL 9005
 C for any color other than standard, starting cost is added.

INSTALLATION TYPE

M for in-ground.

Standard colours

■ RAL 9005
 ■ NCS S 5502-B

Materials and surface treatments

Recycled sand cast aluminium
 Aluminium recycled from scrap, hand cast in sand moulds. The energy consumption when producing recycled aluminium is about 5% of that used when producing virgin aluminium.

Pine

Nola's pine is of high quality and comes from sustainable forestry. Pine is an environmentally friendly, domestically produced material. Damaged or untreated pine is quite easily attacked by decomposition processes; therefore, it is particularly important to repair damaged surfaces.

Topcoat

Painted wood is made with D-Dur Pigmented Polyurethane two-component topcoat. The topcoat has good resistance and outdoor durability. Gloss number: 60.

Powder coating

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

Assembly and placement

In-ground

Cast in ground.

Fully assembled.

Maintenance

Topcoat

Products treated with D-Dur Pigmented polyurethane two-component topcoat should be maintained regularly. Maintenance intervals approx. 1 time per year. Damage and cracks should be repaired immediately. Touch-up paint with, for example, Nordsjö One door and window water-based topcoat.

Sand cast aluminium

Maintenance on aluminium is not normally needed, but make sure to wash and keep the material clean. Untreated aluminium develops a matte surface over time.

Powder coated Aluminium

Products that are powder-coated can be touch-up painted with alkyd paint if necessary.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

Versions

Available as a straight length with armrests or without.

Character

Long is available as a straight length.

Designers

02landskap

02LANDSKAP

