




## Paxa Steel Bench

### Design Blenda Design

This understated bench belongs to the Paxa furniture group, providing a contemporary expression suitable for most environments. Paxa Steel's frame is made of hot-dipped galvanized steel, giving it an industrial character. The bench can either be used as an individual bench or linked to others to form a seating configuration. Paxa Steel is available in two different lengths, with a choice of seats in different materials.

#### CERTIFICATION

Produkt listad i  
Svanens Husportal

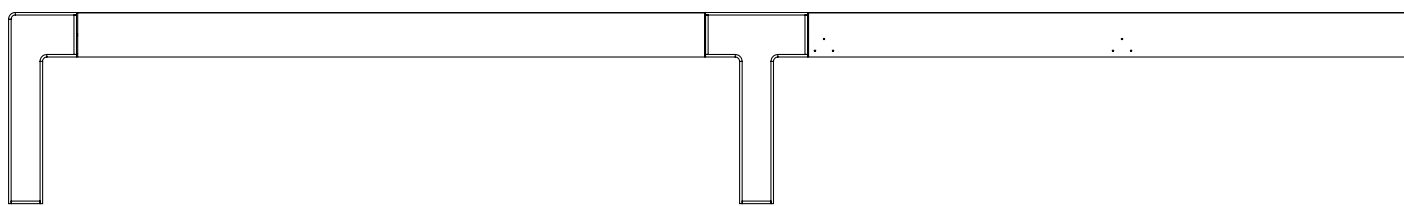

352 cm



45 cm

50 cm

#### Dimensions and weight

Paxa Steel double: Length: 352 cm Height: 45 cm Width: 50 cm Weight: 160 kg

Paxa Steel: Length: 180 cm Height: 45 cm Width: 50 cm Weight: 80 kg

#### Product numbers and combinations

**U20-74** Paxa Steel bench, extended with central support

**U20-75** Paxa Steel bench

**B11-07** Additional fee for choice of non-standard colours on wood

#### Append to product number

##### WOOD AND FINISH

E for oiled oak.

MH for oiled mahogany.

G for tabletop in glazed pine. NCS S 6000-N (grey).

C for any NCS color other than standard, starting cost is added.

##### VARIANTS

A for frame coloured in antracite

No letter after the article number for light grey natural concrete.

##### INSTALLATION TYPE

N for surface mount.

#### Standard colours



NCS S 6000-N (grå)



Oiled oak



Oiled mahogany

#### Materials and surface treatments

### **Pine**

Nola's pine is of high quality and comes from sustainable forestry. Pine is an environmentally friendly, domestically produced material. Damaged or untreated pine is quite easily attacked by decomposition processes; therefore, it is particularly important to repair damaged surfaces.

### **Mahogany - FSC-certified**

FSC-marked mahogany is a wood with good durability in the outdoor environment. In addition, it retains its color tone better than, for example, oak and teak. Mahogany lives and moves, sometimes more than teak.

### **Oak**

Oak is a heavy, hard and medium tough wood. Moderately dimensionally stable in case of moisture changes. Oak wood blackens if it is exposed to moisture or wetness for a long time. However, it does not affect the other properties of the wood. Thanks to its hardness and toughness, the oak wood is suitable for furniture and other use in exposed environments.

### **Wood oil**

Wood oil provides good protection against the stresses of the outdoor climate and at the same time highlights the wood's natural appearance and properties.

### **Water-based glaze**

Varnishing of wood is done with a water-based varnish. A water-based paint that is kinder to the environment. Under normal use, the paint has a good wear resistance and long durability.

### **Fiberbetong**

Fibre-reinforced concrete is a concrete mix with glass fiber. The material has increased strength and elasticity.

### **Steel**

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

### **Hot-dip galvanized**

Hot-dip galvanizing provides very strong protection against corrosion. The steel is dipped into a bath of hot liquid zinc. The zinc attaches and creates a surface coating on the steel part, which is then taken out of the bath and drained of excess zinc.

## **Assembly and placement**

### **Surface mount**

Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

Delivered in sections for assembly on site.

The frame is prepared for the seat to be attached with bolts.

## **Maintenance**

#### **Oiled oak**

Oiled oak should be oiled twice a year for best protection. Good maintenance can never completely prevent stains from occurring, but oak that is not maintained will turn blacker and turn gray faster, but it still has a very long life. When re-oiling products, a finely boiled oil that penetrates the wood should be chosen over a film-forming oil. Black stains on oiled oak can be removed with oxalic acid.

#### **Oiled mahogany**

Oiled mahogany should be oiled two times a year.

#### **Water-based glazed pine**

Products in varnished pine must be maintained regularly with alkyd paint. Maintenance intervals approximately 1 time per year. Damage and cracks should be repaired immediately. Touch-up paints in spray packaging are available in standard colors to order.

#### **GRC**

Can be cleaned with high-pressure flushing, low water pressure, large distance between nozzle and stone and small flushing angle selected (max. 30°). If the outermost layer of concrete is worn away, the coating will become even more susceptible to impurities in the future. Therefore, cleaning with a brush and water is preferable to the hard abrasion that repeated high-pressure washing entails.

There are also cleaning agents for concrete that has been attacked by dirt and algae and then the concrete can be impregnated, which can also be done when the product is new.

Both normal concrete and fiber concrete are sensitive to hard edge impacts. A concrete product that has been damaged can be repaired with polyester filler, for example the Plastic Padding brand.

#### **Hot dip galvanized steel**

Hot-dip galvanized can be touch-up painted with so-called "cold galvanizing".

**Read more in our general maintenance advice at [nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)**

#### **Versions**

The bench is available in two different lengths, with seats in a choice of different materials.

#### **Character**

A low-key bench with a strong design expression that fits into most environments.

## Designers

---

### Blenda Design

Blenda is a designstudio based in Gothenburg, committed to designing furniture for public spaces. With design that works towards both interiors and urban exteriors, they have participated in many projects in the recent years. The products can be found across Sweden, for example in Stavanger Cultural Center, Museum of Modern Art in Stockholm, Arlanda Airport and Gothenburg City library. The studio is run by landscape architect Katarina Gunnarsson and Ingemar Holmlid.

