

nola®




Revet Bike Shed

Design Bengt Isling

The Revet bike shed is a purpose-built enclosure with plenty of room for bicycles. This easy-to-assemble prefabricated structure is built with a durable wooden roof that curves downward to create a wall. Several structures can be combined side-by-side to create a longer shed. Revet offers a value-for-money bike shed with the potential to be extended according to specific requirements. Revet can also provide shelter for baby prams and outdoor equipment.

CERTIFICATION

 **SundaHus**

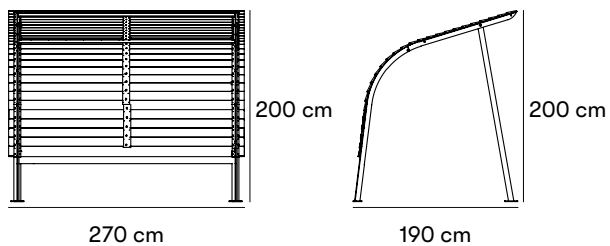

Dimensions and weight

Length: 520 cm/ 270 cm / förlängningsbart i längder om 250 cm
 Height: 200 cm
 Depth: 190 cm

Individual dimensions

Rear leg and middle support in 6 mm sheet metal, front leg in 8 mm sheet metal.
 Connecting pipe: Ø: 76 x 3 mm.
 Wheel holder: hot-dip galvanized solid steel, Ø 12 mm.
 Ceiling in brown Linax impregnated pine: 120 x 22 mm.

Product numbers and combinations

U60-40 Revet bicycle shelter with 5 Goggle bicycle racks, core/starter module, 270 cm version, wooden roof and steel frame in Gris 2900 Sablé
U60-41 Revet bicycle shelter with 10 Goggle bicycle racks, core/starter module, 520 cm version, wooden roof and steel frame in Gris 2900 Sablé
U60-42 Revet bicycle shelter mid-section extension 5 Goggle bicycle racks, 250 cm version, with wooden roof and steel frame in Gris 2900 Sablé
B11-06 Startup cost for powder coating steel in a color other than standard. Choose a RAL colour.

Append to product number

WOOD AND FINISH

LIN for linax impregnated pine.

METAL SURFACE FINISH

C for any color other than standard, starting cost is added.

VARIANTS

RL for wheel holders with frame lock.
 U for Revet Bike shed without wheel holders.

INSTALLATION TYPE

M for in-ground.

Standard colours

■ Gris 2900 Sablé

Materials and surface treatments

The posts that form the rear supports and roof are made in 6 mm plate steel. The front supports are made in 8 mm plate steel. The steel parts are made from zinc-electroplated steel powder-coated in grey 2900 Sablé. The roof is made from

Linax-impregnated pine measuring 120×22 mm. The bicycle rack is made from steel plate pipes with wheel holders made in zinc-electroplated solid steel.

Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

Pine

Nola's pine is of high quality and comes from sustainable forestry. Pine is an environmentally friendly, domestically produced material. Damaged or untreated pine is quite easily attacked by decomposition processes; therefore, it is particularly important to repair damaged surfaces.

Linax

After traditional impregnation according to NTR AB, the wood is boiled in a hot linseed oil with or without color pigments under vacuum. The oil is penetrated into the surface on all six sides, which reduces moisture absorption in the wood and gives a dimensionally stable product over time. The result is a dried product with good resistance to rot that also has long maintenance intervals. Linax-impregnated furniture is intended for outdoor environments only.

Electrogalvanized

Electrogalvanizing (also known as zinc plating) provides corrosion protection through the sacrifice of zinc ions. It is created via a zinc coating on the steel using an electric current.

Powder coating

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

Assembly and placement

In-ground

Cast in ground.

Levereras i delar som slutmonteras på plats.

Bult mot mark ingår ej.

The support posts should be cemented in place or bolted to the surface.

Maintenance

Linax impregnated pine

Linax is a linseed oil-based impregnation that provides extra long durability in outdoor environments and corresponds to impregnation class AB. The impregnated wood turns gray over time, which means that it should be re-oiled if necessary. Use a linseed-based oil for impregnated materials.

Powdercoated steel

Products that are powder-coated can be touch-up painted with alkyd paint.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

Versions

The shelter can be extended according to requirements. Also available as a pram roof.

Character

Revet is a prefabricated value-for-money bicycle shelter with the potential to increase in size.

Designers

Bengt Isling

Landscape Architect, LAR / MSA, Stockholm. Triple winner of the prestigious Siena prize. Co-worker and first landscape architect at Nyréns Architectural Office.



