

nola®




Revet Pram Shelter

Design Bengt Isling

The Revet bike shed is a purpose-built enclosure with plenty of room for bicycles. This easy-to-assemble prefabricated structure is built with a durable wooden roof that curves downward to create a wall. Several structures can be combined side-by-side to create a longer shed. Revet offers a value-for-money bike shed with the potential to be extended according to specific requirements. Revet can also provide shelter for baby prams and outdoor equipment.

CERTIFICATION

 **SundaHus**

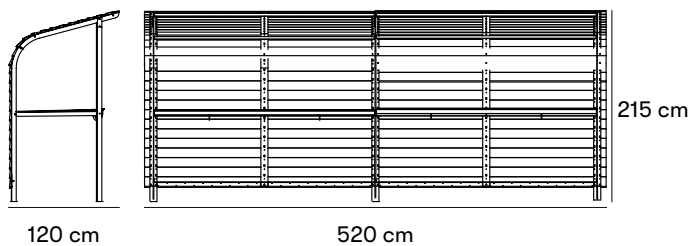

Dimensions and weight

Width: 520 cm
 Height: 215 cm
 Depth: 120 cm

Extension section

Length: 270 cm
 Height: 215 cm
 Depth: 120 cm

Individual dimensions

Rear leg and middle support in 6 mm sheet metal, front leg in 8 mm sheet metal.
 Connecting pipe: Ø: 76 x 3 mm.
 Wheel holder: hot-dip galvanized solid steel, Ø 12 mm.
 Ceiling in brown Linax impregnated pine: 120 x 22 mm.

Product numbers and combinations

U60-43 Revet pram shelter with upper level. 5,2 meters
 U60-44 Revet pram shelter, middle section
 B11-06 Start cost for choice of color.

Append to product number

WOOD AND FINISH

LIN for linax impregnated pine.
 Linax-impregnated pine in brown colour.

METAL SURFACE FINISH

C for any color other than standard, starting cost is added.

INSTALLATION TYPE

M for in-ground.

Standard colours

- Gris 2900 Sablé
- Linax impregnated pine

Materials and surface treatments

The posts that form the rear supports and roof are made in 6 mm plate steel. The front supports are made in 8 mm plate steel. The steel parts are made from zinc-electroplated steel powder-coated in grey 2900 Sablé. The roof is made from Linax-impregnated pine measuring 120x22 mm. The bicycle rack is made from

steel plate pipes with wheel holders made in zinc-electroplated solid steel.

Pine

Nola's pine is of high quality and comes from sustainable forestry. Pine is an environmentally friendly, domestically produced material. Damaged or untreated pine is quite easily attacked by decomposition processes; therefore, it is particularly important to repair damaged surfaces.

Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

Linax

Linax is a linseed oil-based impregnation that provides extra long durability in outdoor environments and corresponds to impregnation class AB. The impregnated wood turns gray over time, which means that it should be re-oiled if necessary. Use a linseed-based oil for impregnated materials.

After traditional impregnation according to NTR AB, the wood is boiled in a hot linseed oil with or without color pigments under vacuum. The oil is penetrated into the surface on all six sides, which reduces moisture absorption in the wood and gives a dimensionally stable product over time. The result is a dried product with good resistance to rot that also has long maintenance intervals. Linax-impregnated furniture is intended for outdoor environments only.

Powder coating

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

Electrogalvanized

Electrogalvanizing (also known as zinc plating) provides corrosion protection through the sacrifice of zinc ions. It is created via a zinc coating on the steel using an electric current.

Assembly and placement

In-ground

Cast in ground.

Delivered in sections to be assembled at location. Bolts for fastening to ground not included

The support posts should be cemented in place or bolted to the surface.

Maintenance

Linax impregnated pine

Outdoor furniture requires oiling every 5 years and panel products and roofs require oiling every 12 years. Maintenance should be done with linseed oil varnish. It is important that the wood is clean and dry (max. 20% moisture content) before it is finished with oil. When washing, do not use high-pressure cleaners. Washing should be done with lukewarm water and then rinsed off with a water hose at normal pressure. Strong grease-dissolving agents should not be used, but washing should be done with a mild household detergent. Detergents containing bleach should also not be used.

The oil can be applied with a roller or brush. Too much oil can cause growth on the wood and give a sticky surface. Attacks by growth can also occur if the wood has not been sufficiently dry or cleaned before the oil is applied. Growth does not damage the wood and is relatively easy to remove, but has a tendency to return.

Powdercoated steel

Products that are powder-coated can be touch-up painted with alkyd paint.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

Versions

The shelter can be extended according to requirements. Also available as a pram roof.

Character

Revet is a prefabricated value-for-money pram shelter with the potential to increase in size.

Designers

Bengt Isling

Landscape Architect, LAR / MSA, Stockholm. Triple winner of the prestigious Siena prize. Co-worker and first landscape architect at Nyréns Architectural Office.



