

nola®



## Rocky Table - Square


Design

CERTIFICATION

Produkt listad i  
Svanens Husportal



**SundaHus**

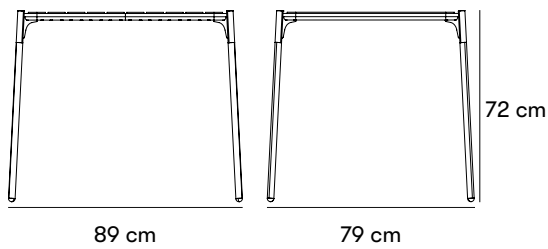

**Dimensions and weight**

Height: 72 cm  
 Width: 89 cm  
 Depth: 79 cm  
 Table surface Width: 74 cm  
 Table surface Depth: 64 cm

**Product numbers and combinations**

U15-94 Rocky Square Table  
 B11-06 Additional fee for choosing a non-standard colour

**Append to product number**


**WOOD AND FINISH**

ACC for accoya.  
 EK for oiled oak.  
 SIOO for sioo:x treatment oak.  
 MH for oiled mahogany.

**METAL SURFACE FINISH**

T for frame in turquoise RAL 6034.  
 S for frame in black RAL 9005.  
 R for frame in red RAL 3009.  
 C for any color other than standard, at additional cost.

**Standard colours**



**Materials and surface treatments**

**Accoya**  
 Accoya® wood is the result of more than 80 years of research and development into modifying wood through an acetylation process. Accoya® wood is Radiata pine, a fast-growing wood virtually free of knots that is harvested from renewable FSC-certified forests. Accoya® wood has properties that match or exceed those of tropical woods and the treatment process is non-toxic. The pale wood will turn grey over time and may develop dark spots over time. Accoya® can withstand humid and rainy environments very well and expands/contracts less than other tropical-type woods.

### **Mahogany - FSC-certified**

FSC-marked mahogany is a wood with good durability in the outdoor environment. In addition, it retains its color tone better than, for example, oak and teak. Mahogany lives and moves, sometimes more than teak.

### **Oak**

Oak is a heavy, hard and medium tough wood. Moderately dimensionally stable in case of moisture changes. Oak wood blackens if it is exposed to moisture or wetness for a long time. However, it does not affect the other properties of the wood. Thanks to its hardness and toughness, the oak wood is suitable for furniture and other use in exposed environments.

### **Wood oil**

Wood oil provides good protection against the stresses of the outdoor climate and at the same time highlights the wood's natural appearance and properties.

### **SiOO:X treatment**

Sioo:x is a wood protection with environmentally friendly silicon technology. Water-based and biocide-free. We use Sioo mainly for our oak furniture. Sioo:x treatment of is suitable for all woods, outside as well as inside, and gives a light surface without pigments. The surface is UV-resistant, water-repellent and non-stick. Active and preventive action against algae, mould and pests. Also rot-proof, wood-strengthening and fire-retardant. This wood protection provides long durability and easy maintenance.

### **Steel**

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

### **Electrogalvanized**

Electrogalvanizing (also known as zinc plating) provides corrosion protection through the sacrifice of zinc ions. It is created via a zinc coating on the steel using an electric current.

### **Powder coating**

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

## **Assembly and placement**

### **Freestanding**

Freestanding product that is placed directly on the ground.

## **Maintenance**

### **Powdercoated steel**

Products that are powder-coated can be touch-up painted with alkyd paint.

### **Oiled oak**

Oiled oak should be oiled twice a year for best protection. Good maintenance can never completely prevent stains from occurring, but oak that is not maintained will turn blacker and turn gray faster, but it still has a very long life. When re-oiling products, a finely boiled oil that penetrates the wood should be chosen over a film-forming oil.

**Oiled mahogany**

Oiled mahogany should be oiled two times a year.

**SiOO:X treatment oak**

Sioo:x-treated products are treated twice upon delivery; once with a wood protection (Premium Träskydd Altan) and once with a surface protection (Premium Ytskydd Altan). After 12 - 18 months, for best durability, the surface should be treated once more with Sioo:x Premium Ytskydd Altan. It is important to keep the product clean, otherwise the surface protection can be destroyed. Products that are exposed to heavy mechanical wear may need extra treatments. The surface treatment has a tested effect according to the standards EN 46 and EN 113.

For information about the Sioo treatment see the website [www.sioox.se](http://www.sioox.se).

**Accoya**

Accoya is maintenance-free and does not require any special treatment to preserve its unique properties. If black spots should appear on the wood from pollution in the air, these are easily removed with any kind of furniture wash.

**Read more in our general maintenance advice at [nola.se/en/care-and-maintenance](http://nola.se/en/care-and-maintenance)**