

nola®




Rocky Table - Round

Design

Part of the Rocky series, the Rocky table is a sleek complement to the chair and rocking chair designed for this furniture group. The surface is crafted in long-lasting acetylated Accoya® wood. The streamlined metal frame provides a striking contrast to the tabletop's wood grain and rich natural texture. Available in three sizes, the Rocky table is suited to a variety of outdoor settings.

CERTIFICATION

Produkt listad i
Svanens Husportal  

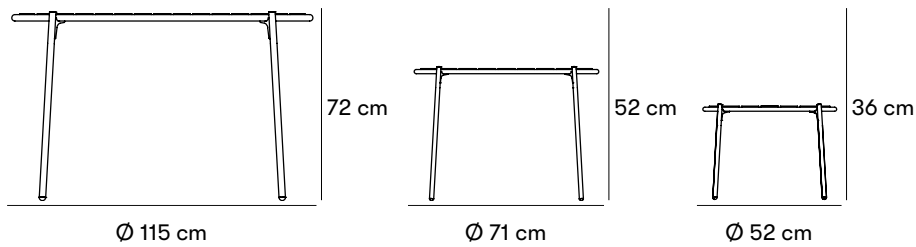

Dimensions and weight

Height: 72 cm / 52 cm / 36 cm
 Ø: 115 cm / 71 cm / 52 cm

Product numbers and combinations

U15-95 Rocky table, large Ø 115 cm
 U15-96 Rocky table, medium Ø 71 cm
 U15-97 Rocky table, small Ø 52 cm
 B11-06 Additional fee for choosing a non-standard colour

Append to product number


WOOD AND FINISH

ACC for accoya.
 EK for oiled oak.
 SIOO for sioo:x treatment oak.
 MH for oiled mahogany.

METAL SURFACE FINISH

T for frame in turquoise RAL 6034.
 S for frame in black RAL 9005.
 R for frame in red RAL 3009.
 C for any color other than standard, at additional cost.

Standard colours



Materials and surface treatments

Accoya
 Accoya® wood is the result of more than 80 years of research and development into modifying wood through an acetylation process. Accoya® wood is Radiata pine, a fast-growing wood virtually free of knots that is harvested from renewable FSC-certified forests. Accoya® wood has properties that match or exceed those of tropical woods and the treatment process is non-toxic. The pale wood will turn grey over time and may develop dark spots over time. Accoya® can withstand humid and rainy environments very well and expands/contracts less than other tropical-type woods.

Mahogany - FSC-certified

FSC-marked mahogany is a wood with good durability in the outdoor environment. In addition, it retains its color tone better than, for example, oak and teak. Mahogany lives and moves, sometimes more than teak.

Oak

Oak is a heavy, hard and medium tough wood. Moderately dimensionally stable in case of moisture changes. Oak wood blackens if it is exposed to moisture or wetness for a long time. However, it does not affect the other properties of the wood. Thanks to its hardness and toughness, the oak wood is suitable for furniture and other use in exposed environments.

Wood oil

Wood oil provides good protection against the stresses of the outdoor climate and at the same time highlights the wood's natural appearance and properties.

SiOO:X treatment

Sioo:x is a wood protection with environmentally friendly silicon technology. Water-based and biocide-free. We use Sioo mainly for our oak furniture. Sioo:x treatment of is suitable for all woods, outside as well as inside, and gives a light surface without pigments. The surface is UV-resistant, water-repellent and non-stick. Active and preventive action against algae, mould and pests. Also rot-proof, wood-strengthening and fire-retardant. This wood protection provides long durability and easy maintenance.

Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

Electrogalvanized

Electrogalvanizing (also known as zinc plating) provides corrosion protection through the sacrifice of zinc ions. It is created via a zinc coating on the steel using an electric current.

Powder coating

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

Assembly and placement

Freestanding

Freestanding product that is placed directly on the ground.

The tabletop is completely assembled for attachment to the frame after delivery.

Maintenance

Glans 60. Pulverlack går att beställa på sprayflaska.

Powdercoated steel

Products that are powder-coated can be touch-up painted with alkyd paint.

Oiled oak

Oiled oak should be oiled twice a year for best protection. Good maintenance can never completely prevent stains from occurring, but oak that is not maintained will turn blacker and turn gray faster, but it still has a very long life. When re-oiling products, a finely boiled oil that penetrates the wood should be chosen over a film-forming oil.

Oiled mahogany

Oiled mahogany should be oiled two times a year.

SiOO:X treatment oak

Sioo:x-treated products are treated twice upon delivery; once with a wood protection (Premium Träskydd Altan) and once with a surface protection (Premium Ytskydd Altan). After 12 - 18 months, for best durability, the surface should be treated once more with Sioo:x Premium Ytskydd Altan. It is important to keep the product clean, otherwise the surface protection can be destroyed. Products that are exposed to heavy mechanical wear may need extra treatments. The surface treatment has a tested effect according to the standards EN 46 and EN 113.

For information about the Sioo treatment see the website www.sioox.se.

Accoya

Accoya is maintenance-free and does not require any special treatment to preserve its unique properties. If black spots should appear on the wood from pollution in the air, these are easily removed with any kind of furniture wash.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](http://nola.se/en/care-and-maintenance)

Versions

The Rocky tables are complemented by the chair and rocking chair in the Rocky series.

