

nola®




Rousseau Chair

Design Anki Gneib

With their elegant steel frames, the designs in the new Rousseau furniture group present a compelling meeting of classic styles and contemporary form. The furniture group is suited to a wide range of environments, from outdoor cafes and restaurants, to courtyards and gardens.

CERTIFICATION



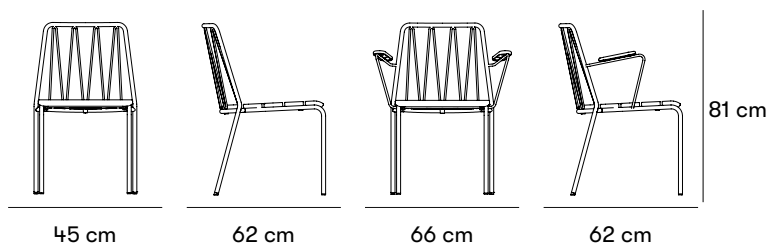

Dimensions and weight

Width: Stol 45 cm Karmstol 66 cm

Height: 81 cm

Armrest height: 67,5 cm

Sitting height: 45 cm

Sitting depth: 47 cm

Depth: 62 cm

Weight 7,8 kg/ 8 kg

Product numbers and combinations

U80-70 Rousseau chair

U80-70A Rousseau chair with armrests

Append to product number

WOOD AND FINISH

E for oiled oak.

MH for oiled mahogany.

METAL SURFACE FINISH

C for a color other than standard, initial cost is added.

Standard colours

■ RAL 7022

■ Oiled oak

■ Oiled mahogany

Materials and surface treatments

Mahogany - FSC-certified

FSC-marked mahogany is a wood with good durability in the outdoor environment. In addition, it retains its color tone better than, for example, oak and teak. Mahogany lives and moves, sometimes more than teak.

Oak

Oak is a heavy, hard and medium tough wood. Moderately dimensionally stable in case of moisture changes. Oak wood blackens if it is exposed to moisture or wetness for a long time. However, it does not affect the other properties of the wood. Thanks to its hardness and toughness, the oak wood is suitable for furniture and other use in exposed environments.

Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

Powder coating

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

Electrogalvanized

Electrogalvanizing (also known as zinc plating) provides corrosion protection through the sacrifice of zinc ions. It is created via a zinc coating on the steel using an electric current.

Wood oil

Wood oil provides good protection against the stresses of the outdoor climate and at the same time highlights the wood's natural appearance and properties.

Assembly and placement

Freestanding

Freestanding product that is placed directly on the ground.

Levereras monterad

Fristående

Maintenance

Oiled oak

Oiled oak should be oiled twice a year for best protection. Good maintenance can never completely prevent stains from occurring, but oak that is not maintained will turn blacker and turn gray faster, but it still has a very long life. When re-oiling products, a finely boiled oil that penetrates the wood should be chosen over a film-forming oil. Black stains on oiled oak can be removed with oxalic acid.

Oiled mahogany

Oiled mahogany should be oiled two times a year.

Powdercoated steel

Products that are powder-coated can be touch-up painted with alkyd paint.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

Versions

Stol med eller utan armstöd

Designers

Anki Gneib

Anki Gneib has an education in Interior Architecture and Furniture Design at the University College of Art, Crafts and Design in Stockholm. In her studio, she works creatively with a wide range of projects such as residential architecture, interior design for commercial spaces with a focus on facility branding as well as furniture, lighting and product design. Her work is characterized by experimental and playful expressions through both process and results.



