



## Sidewalk Bench


### Design

The Sidewalk bench belongs to the Sidewalk furniture group. Characterised by clean lines and precise angles, the bench has a contemporary character. The frames and legs are made from lengths of square steel treated with a silvery finish, complemented by wooden parts that showcase the beauty of painted wood. The seats and tabletop are supported by steel posts that bolt to the ground, creating a stable, immovable base.


### CERTIFICATION

Produkt listad i  
Svanens Husportal 

### FEATURES

 Designed for accessibility



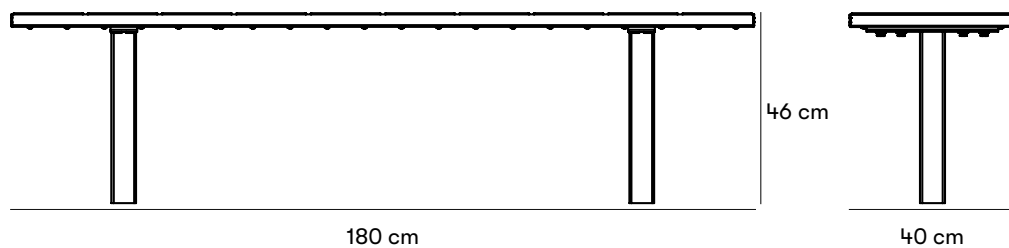

#### Dimensions and weight

Length: 180 cm  
Width: 40 cm  
Sitting height: 46 cm  
Weight 32 kg

#### Product numbers and combinations

U17-04M Sidewalk Bench  
U17-04/ARM Sidewalk Bench with armrest  
B11-06 Additional fee for choosing a non-standard colour  
B11-07 Additional fee for choosing a non-standard colour on wood

#### Append to product number

##### WOOD AND FINISH

SiOO for siOO:x treatment oak.  
G for RAL 1023 yellow for top-glazed pine.  
C for any color other than standard, at additional cost.

##### METAL SURFACE FINISH

Specify color choice for steel when ordering.  
RAL 7035 is standard.  
C for any color other than standard, at additional cost.






##### VARIANTS

PURGS for seat in PUR grey-black NCS 8502-B (bench seat only).  
PURGR for seat in PUR green NCS S 8010-G10Y (bench seat only).  
Sofa with seat in PUR is delivered with back/armrest in top-glazed pine in the same colour  
C for any color other than standard, at additional cost.

##### INSTALLATION TYPE

N for surface mount.  
M for in-ground.

#### Standard colours

	RAL 7035
	RAL 1023
	NCS S 8502-B
	NCS S 8010-G10Y (Grön)
	SiOO:X treatment oak



## Materials and surface treatments

### Pine

Nola's pine is of high quality and comes from sustainable forestry. Pine is an environmentally friendly, domestically produced material. Damaged or untreated pine is quite easily attacked by decomposition processes; therefore, it is particularly important to repair damaged surfaces.

### Oak

Oak is a heavy, hard and medium tough wood. Moderately dimensionally stable in case of moisture changes. Oak wood blackens if it is exposed to moisture or wetness for a long time. However, it does not affect the other properties of the wood. Thanks to its hardness and toughness, the oak wood is suitable for furniture and other use in exposed environments.

### Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

### Plastic / Polyurethane Foam

Polyurethane foam is a highly elastic polymer product and provides a bouncy structure and feels extra comfortable to sit on. With its attributes such as being allergy-neutral, long-lasting and fire- and flame-resistant, it can easily be used in public environments.

### SiOO:X treatment

Sioo:x is a wood protection with environmentally friendly silicon technology. Water-based and biocide-free. We use Sioo mainly for our oak furniture. Sioo:x treatment of is suitable for all woods, outside as well as inside, and gives a light surface without pigments. The surface is UV-resistant, water-repellent and non-stick. Active and preventive action against algae, mould and pests. Also rot-proof, wood-strengthening and fire-retardant. This wood protection provides long durability and easy maintenance.

### Water-based glaze

Varnishing of wood is done with a water-based varnish. A water-based paint that is kinder to the environment. Under normal use, the paint has a good wear resistance and long durability.

### Electrogalvanized

Electrogalvanizing (also known as zinc plating) provides corrosion protection through the sacrifice of zinc ions. It is created via a zinc coating on the steel using an electric current.

### Powder coating

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

## Assembly and placement

### In-ground

Cast in ground.



#### **Surface mount**

Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

The seat is delivered fully assembled, ready for the legs to be attached with the screws provided. Bolts for attaching the product to the surface are not included.

### **Maintenance**

#### **SiOO:X treatment oak**

Sioo:x-treated products are treated twice upon delivery; once with a wood protection (Premium Träskydd Altan) and once with a surface protection (Premium Ytskydd Altan). After 12 - 18 months, for best durability, the surface should be treated once more with Sioo:x Premium Ytskydd Altan. It is important to keep the product clean, otherwise the surface protection can be destroyed. Products that are exposed to heavy mechanical wear may need extra treatments. The surface treatment has a tested effect according to the standards EN 46 and EN 113.

For information about the Sioo treatment see the website [www.sioox.se](http://www.sioox.se).

#### **Water-based glazed pine**

Products in varnished pine must be maintained regularly with alkyd paint. Maintenance intervals approximately 1 time per year. Damage and cracks should be repaired immediately. Touch-up paints in spray packaging are available in standard colors to order.

#### **Powdercoated steel**

Products that are powder-coated can be touch-up painted with alkyd paint.

**Read more in our general maintenance advice at [nola.se/en/care-and-maintenance](http://nola.se/en/care-and-maintenance)**

### **Character**

The Sidewalk bench is part of the Sidewalk furniture group, which includes a bar stool, chair, table and a park bench.



