


nola[®]

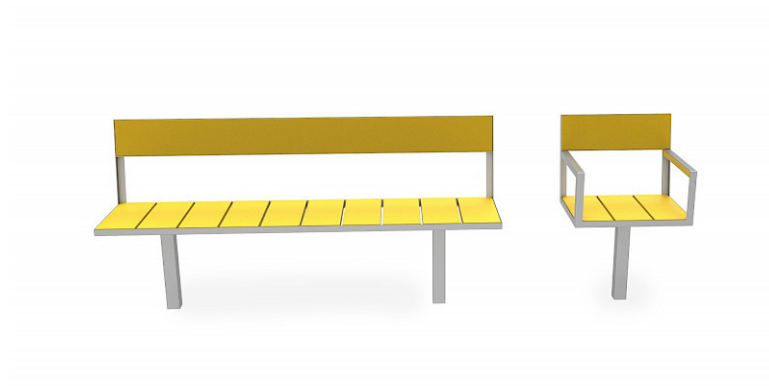

Sidewalk Chair


Design


This streamlined chair characterised by clean lines and precise angles that give it a contemporary character. The frame is made from lengths of smooth steel treated with a silvery finish, complemented by a wooden seat and backrest. The seat is supported by a steel posts that bolts to the ground, creating a stable, immovable base. The Sidewalk chair is a part of the Sidewalk furniture group.

CERTIFICATION

Produkt listad i
Svanens Husportal  BYGGGARU
BEDÖMNINGEN

FEATURES

 Designed for accessibility

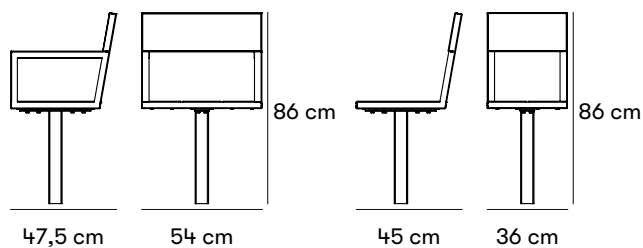

Dimensions and weight

Width: 36 cm / 54 cm
 Height: 86 cm
 Armrest height: 68.5 cm
 Sitting height: 46 cm
 Sitting depth: 45 cm / 47.5 cm
 Depth: 45 cm / 47.5 cm

Weight of chair / armchair: 12 kg / 18 kg
 Width of chair / armchair: 36 cm / 54 cm
 Depth of chair / armchair: 45 cm / 47.5 cm
 Height of armrest: 68.5 cm

Product numbers and combinations

U17-08 Sidewalk Chair
 U17-09M Sidewalk Armchair (wider than the chair)
 B11-06 Additional fee for choosing a non-standard colour
 B11-07 Additional fee for choosing a non-standard colour on wood

Append to product number

WOOD AND FINISH

SIOO for sioo:x treatment oak.
 G for RAL 1023 yellow for top-glazed pine.
 C for any color other than standard, at additional cost.

METAL SURFACE FINISH

Specify color choice for steel when ordering.
 RAL 7035 is standard.
 C for any color other than standard, at additional cost.


VARIANTS

PURGS for seat in PUR grey-black NCS 8502-B (bench seat only).
 PURGR for seat in PUR green NCS S 8010-G10Y (bench seat only).
 Sofa with seat in PUR is delivered with back/armrest in top-glazed pine in the same colour.
 C for any color other than standard, at additional cost.

INSTALLATION TYPE

N for surface mount.
 M for in-ground.

Standard colours



Materials and surface treatments

Polyurethane.

Pine

Nola's pine is of high quality and comes from sustainable forestry. Pine is an environmentally friendly, domestically produced material. Damaged or untreated pine is quite easily attacked by decomposition processes; therefore, it is particularly important to repair damaged surfaces.

Oak

Oak is a heavy, hard and medium tough wood. Moderately dimensionally stable in case of moisture changes. Oak wood blackens if it is exposed to moisture or wetness for a long time. However, it does not affect the other properties of the wood. Thanks to its hardness and toughness, the oak wood is suitable for furniture and other use in exposed environments.

Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

Plastic / Polyurethane Foam

Polyurethane foam is a highly elastic polymer product and provides a bouncy structure and feels extra comfortable to sit on. With its attributes such as being allergy-neutral, long-lasting and fire- and flame-resistant, it can easily be used in public environments.

SiOO:X treatment

Sioo:x is a wood protection with environmentally friendly silicon technology. Water-based and biocide-free. We use Sioo mainly for our oak furniture. Sioo:x treatment of is suitable for all woods, outside as well as inside, and gives a light surface without pigments. The surface is UV-resistant, water-repellent and non-stick. Active and preventive action against algae, mould and pests. Also rot-proof, wood-strengthening and fire-retardant. This wood protection provides long durability and easy maintenance.

Water-based glaze

Varnishing of wood is done with a water-based varnish. A water-based paint that is kinder to the environment. Under normal use, the paint has a good wear resistance and long durability.

Electrogalvanized

Electrogalvanizing (also known as zinc plating) provides corrosion protection through the sacrifice of zinc ions. It is created via a zinc coating on the steel using an electric current.

Powder coating

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

Assembly and placement

In-ground

Cast in ground.

Surface mount

Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

The seat and backrest are delivered fully assembled, ready for the supporting posts to be attached with the screws provided.

Bolts for attaching the product to the surface are not included.

Maintenance

SiOO:X treatment oak

Sioo:x-treated products are treated twice upon delivery; once with a wood protection (Premium Träskydd Altan) and once with a surface protection (Premium Ytskydd Altan). After 12 - 18 months, for best durability, the surface should be treated once more with Sioo:x Premium Ytskydd Altan. It is important to keep the product clean, otherwise the surface protection can be destroyed. Products that are exposed to heavy mechanical wear may need extra treatments. The surface treatment has a tested effect according to the standards EN 46 and EN 113.

For information about the Sioo treatment see the website www.sioox.se.

Water-based glazed pine

Products in varnished pine must be maintained regularly with alkyd paint. Maintenance intervals approximately 1 time per year. Damage and cracks should be repaired immediately. Touch-up paints in spray packaging are available in standard colors to order.

Powdercoated steel

Products that are powder-coated can be touch-up painted with alkyd paint.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](http://nola.se/en/care-and-maintenance)

Versions

Available as a chair or as an armchair (the armchair is 18 cm wider than the chair) complemented by other products in the Sidewalk furniture group.

Character

The Sidewalk chair is part of the Sidewalk furniture group, which includes a bar stool, chair, table, park bench and bench.