




Sirius Planter

Design Bernt Fröderberg

Sirius spaljë ingår i System Utblick som är ett flexibelt system i stål och trä för kombination av spaljëer, stolpar och pergolatak. Spaljéerna och stolparna i Sirius är tillverkade i lackerat stål. Spaljéerna kan förses med en kvadratperforerad plåt, tilläggsbeteckning T, som ger en 40% vindgenomsläpplighet för bästa vindreduktion.

CERTIFICATION



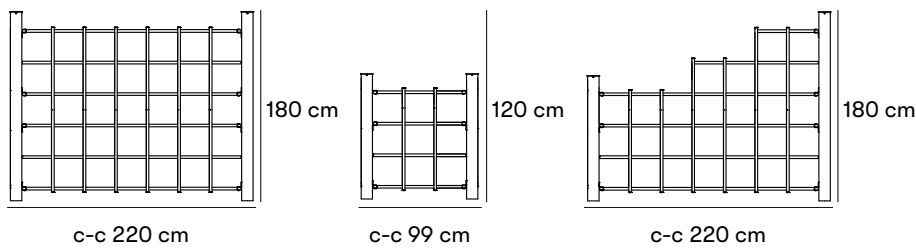

Dimensions and weight

Sirius Trellis

Length: C-C 99 cm och C-C 220 cm

Trellis: 98 cm/ 129 cm/ 159 cm ascending right or left

Straight: Height: 98 cm och 159 cm

Post height: 120 cm och 180 cm (above ground)

Individual dimensions

Posts: 108 x 3.6 mm

Trellis: 25 x 3 mm

Perforated sheet: Thickness 2 mm

Product numbers and combinations

Ö70-01 Sirius post 120 cm

Ö70-02 Sirius post 180 cm

Ö70-10 Sirius trellis, length c-c 220 cm, height 98 cm

Ö70-11 Sirius trellis, length c-c 220 cm, height 159 cm

Ö70-12HSirius trellis, length c-c 220 cm, height 98/129/159 cm, staggered trellis right

Ö70-12V Sirius trellis, length c-c 220 cm, height 98/129/159 cm, staggered trellis left

Ö70-13 Sirius trellis, length c-c 99 cm, height 159 cm

Ö70-14 Sirius trellis, length c-c 99 cm, height 98 cm

B11-06 Startup cost for powder coating steel in a color other than standard. Choose a RAL colour.

Append to product number

METAL SURFACE FINISH

S for black RAL 9005.

A for anthracite Pig 2900 Sablé.


G for dark green RAL 6012.

C for steel any colour, start-up costs are added.

INSTALLATION TYPE

M for in-ground.

Standard colours



Materials and surface treatments

Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

Powder coating

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

Electrogalvanized

Electrogalvanizing (also known as zinc plating) provides corrosion protection through the sacrifice of zinc ions. It is created via a zinc coating on the steel using an electric current.

Assembly and placement

In-ground

Cast in ground.

Posts for trellis are drilled and threaded on site. Trellis is delivered in finished units. Note: that the trellis has an "outside" and an "inside". The standing pipes must be facing outwards. That the specified c-c dimensions are center dimensions between posts. Height measure is the height measure on the trellis. Overall dimensions above ground are height measurements + 12 cm.

Posts cast 70 cm in the ground. Based on non-frost-repellent material to frost-free depth.

Maintenance

Powdercoated steel

Products that are powder-coated can be touch-up painted with alkyd paint.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

Versions

Standard colors on steel are black, anthracite or dark green.
The trellis can be provided with a square perforated plate.

Character

Trellis that is part of the system Outlook. A varied system with many possibilities.

Bernt Fröderberg

Bernt Fröderberg is a landscape architect MSA with long and broad experience. The projects span everything from private gardens, homes, parks to complex road environments.

— In my role as a designer, I hope to be able to bring a care for the built details in the green environment that enhances the final impression even in relatively everyday construction projects. The importance of well-designed solutions in the slightly more prestigious assignments can hardly be underestimated. My starting points in the design work are, among other things, to use renewable materials and to give the built detail a long life.

