nola




Solsäng Seating Furniture

Design Peter Ekroth

This comfortable year-round lounge chair is at home in any outdoor setting. Urban dwellers can make the most of the sunshine by sitting back, relaxing and stretching their legs in one of our most striking designs. Sunbed is contoured to position the body for relaxation, and its striking profile makes it an attractive feature in city parks, hotel courtyards and waterside areas.

CERTIFICATION

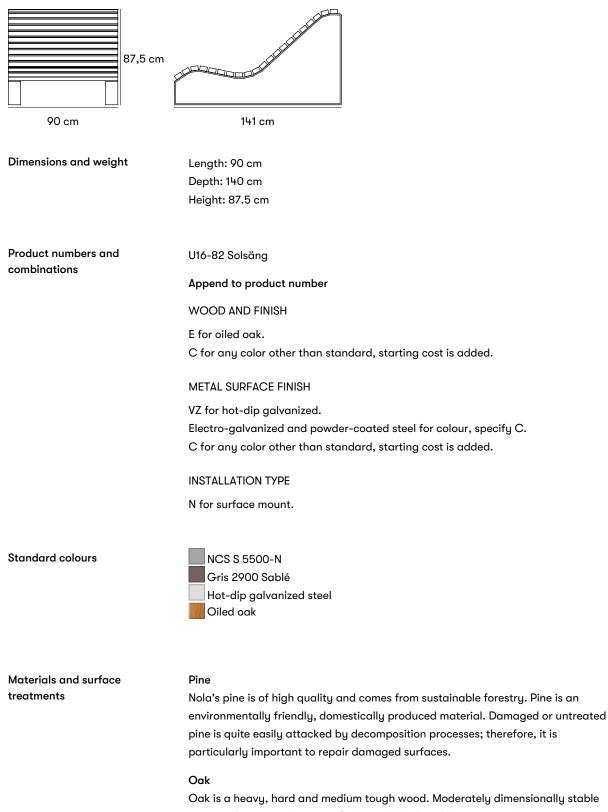

In case of moisture changes. Oak wood blackens if it is exposed to moisture or wetness for a long time. However, it does not affect the other properties of the wood. Thanks to its hardness and toughness, the oak wood is suitable for furniture and other use in exposed environments.

Water-based glaze

Varnishing of wood is done with a water-based varnish. A water-based paint that is kinder to the environment. Under normal use, the paint has a good wear resistance and long durability.

Wood oil

Wood oil provides good protection against the stresses of the outdoor climate and at the same time highlights the wood's natural appearance and properties.

Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

Hot-dip galvanized or electrogalvanized and powder coating Available in either only hot-dip galvanized steel or electro-galvanized and powder-coated steel.

Hot-dip galvanizing provides very strong protection against corrosion. The steel is dipped into a bath of hot liquid zinc. The zinc attaches and creates a surface coating on the steel part, which is then taken out of the bath and drained of excess zinc.

Electrogalvanizing provides corrosion protection through the sacrifice of zinc ions. It is created via a zinc coating on the steel using an electric current. Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

Assembly and placement	Freestanding
	Freestanding product that is placed directly on the ground.
	Surface mount
	Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts
	not included.
	Fully assembled.
Maintenance	Water-based glazed pine
	Products in varnished pine must be maintained regularly with alkyd paint.
	Maintenance intervals approximately 1 time per year. Damage and cracks should
	be repaired immediately. Touch-up paints in spray packaging are available in
	standard colors to order.
	Oiled oak
	Oiled oak should be oiled twice a year for best protection. Good maintenance

Chied oak should be olled twice a year for best protection. Good maintenance can never completely prevent stains from occurring, but oak that is not maintained will turn blacker and turn gray faster, but it still has a very long life. When re-oiling products, a finely boiled oil that penetrates the wood should be chosen over a film-forming oil. Black stains on oiled oak can be removed with oxalic acid.

Powdercoated steel

Products that are powder-coated can be touch-up painted with alkyd paint.

Hor dip galvanized steel

Hot-dip galvanized can be touch-up painted with so-called "cold galvanizing".

Read more in our general maintenance advice at nola.se/en/care-andmaintenance

Comfortable year-round lounge chair for any outdoor setting.

Designers

Character

Peter Ekroth Landskapsarkitekt och konstnär.



