



nola®

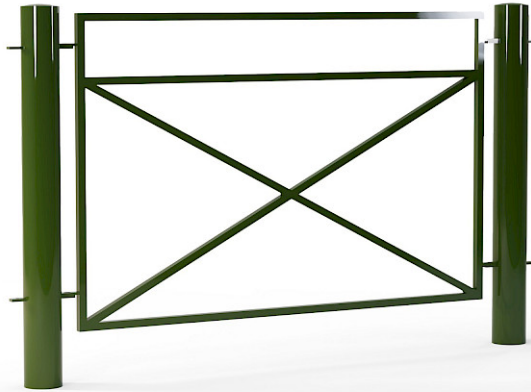

Campo Express Modular Fencing System

Design

Campo is a flexible fencing system made from hot-dip galvanized, powder-coated steel. The fence provides low barriers for a wide range of properties and applications. As a modular system, Campo offers a range of combination possibilities. The units combine to create railings for terraces, park fences and pedestrian barriers to direct human traffic. The robust components withstand passing traffic and harsh weather conditions.

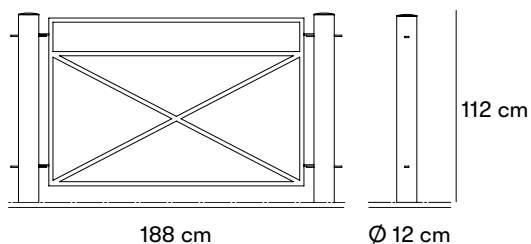

Dimensions and weight

Length: C-C 176 cm

Height: 112 cm

Ø: 12 cm

Start section: Length: 152 cm. Height: 110 cm.

Product numbers and combinations

Ö17-35 staketsektion

Ö17-36 slutstolpe

Ö17-37 mittstolpe

Ö17-38 90° vinkelstolpe

Append to product number

METAL SURFACE FINISH

GR for dark green RAL 6009.

S for black RAL 9005.

C for another color other than standard, starting cost is added.

INSTALLATION TYPE

M for in-ground.

Standard colours

■ RAL 6009

■ RAL 9005

Materials and surface treatments

Staketsektion i fyrkantsprofil VKR 25 x 25 mm. Stolpar i rör Ø121 mm med välvd topp.

Delarna är varmförzinkade, svepblästrade och pulverlackerade i mörkgrönt RAL 6009 eller svart RAL 9005.

Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

Hot-dip galvanized

Hot-dip galvanizing provides very strong protection against corrosion. The steel is dipped into a bath of hot liquid zinc. The zinc attaches and creates a surface coating on the steel part, which is then taken out of the bath and drained of excess zinc.

Powder coating

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

Assembly and placement

In-ground

Cast in ground.

Staketet monteras mot stolparna med bult, mutter och bricka.

Maintenance

Powdercoated steel

Products that are powder-coated can be touch-up painted with alkyd paint.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

Versions

Standardkulörer mörkgrönt RAL 6009 alternativt svart RAL 9005.

Character

Klassiskt staket i pulverlackerat stål.

