

nola®




Sunday Multi-sided Bench

Design Ana Mir & Emili Padrós, Emiliana Design Studio

This generous seat is called Sunday, but it was designed for use every day of the week. Made from slats of Sioo-impregnated oak, the surface folds into three different heights. A multi-sided bench with no front or back, Sunday invites individuals to sit in comfort or recline in style. Sunday can seat as many individuals as several benches but occupies less space, offering a practical alternative to a furniture group.

CERTIFICATION

Produkt listad i
Svanens Husportal 

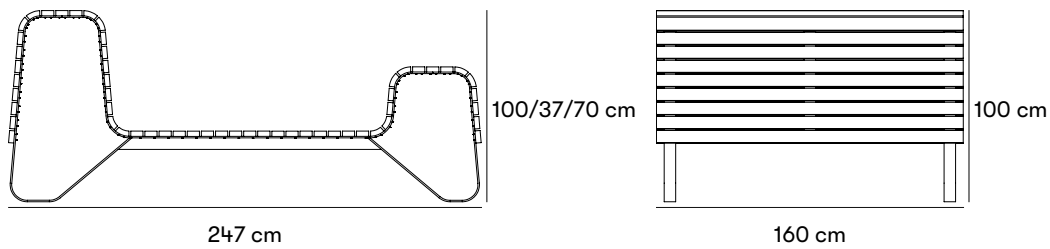

Dimensions and weight

Length: 247 cm
 Width: 160 cm
 Height: 100 cm
 Sitting height: 37/ 70/ 100 cm
 Weight 164 kg

Product numbers and combinations

U16-83SIOO Sunday bench
 B11-06 Startup cost for powder coating steel in a color other than standard

Append to product number

WOOD AND FINISH

SIOO for sioo:x treatment oak.

METAL SURFACE FINISH

RAL 1018

C for stand any color other than standard, starting cost is added.

INSTALLATION TYPE

N for surface mount.

Standard colours

- RAL 1018
- SiOO:X treatment oak

Materials and surface treatments

Steel: zinc plated, yellow powder coated yellow RAL 1018.

Oak

Oak is a heavy, hard and medium tough wood. Moderately dimensionally stable in case of moisture changes. Oak wood blackens if it is exposed to moisture or wetness for a long time. However, it does not affect the other properties of the wood. Thanks to its hardness and toughness, the oak wood is suitable for furniture and other use in exposed environments.

SiOO:X treatment

Sioo:x is a wood protection with environmentally friendly silicon technology. Water-based and biocide-free. We use Sioo mainly for our oak furniture. Sioo:x treatment of is suitable for all woods, outside as well as inside, and gives a light surface without pigments. The surface is UV-resistant, water-repellent and non-stick. Active and preventive action against algae, mould and pests. Also rot-proof, wood-strengthening and fire-retardant. This wood protection provides long durability and easy maintenance.

Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

Electrogalvanized

Electrogalvanizing (also known as zinc plating) provides corrosion protection through the sacrifice of zinc ions. It is created via a zinc coating on the steel using an electric current.

Powder coating

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

Assembly and placement

Freestanding

Freestanding product that is placed directly on the ground.

Surface mount

Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

Requires no installation.

Maintenance

SiOO:X treatment oak

Sioo:x-treated products are treated twice upon delivery; once with a wood protection (Premium Träskydd Altan) and once with a surface protection (Premium Ytskydd Altan). After 12 - 18 months, for best durability, the surface should be treated once more with Sioo:x Premium Ytskydd Altan. It is important to keep the product clean, otherwise the surface protection can be destroyed. Products that are exposed to heavy mechanical wear may need extra treatments. The surface treatment has a tested effect according to the standards EN 46 and EN 113.

For information about the Sioo treatment see the website www.sioox.se.

Powdercoated steel

Products that are powder-coated can be touch-up painted with alkyd paint.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](http://nola.se/en/care-and-maintenance)

Character

A multi-sided bench with no front or back. Invites individuals to sit in comfort.

Designers

Ana Mir & Emili Padrós,
Emiliana Design Studio

