


nola®



City Stål

Design Jessing

This streamlined outdoor bench is a popular urban design. Its efficient shape is naturally suited to streets, parks and other public spaces. The benches can be complemented by a table from the City furniture group, and can be ordered as a complete bench supported by metal columns underneath. The City bench can be further customised by choosing from among a range of different seats (angled or straight), types of armrests and several frame designs.

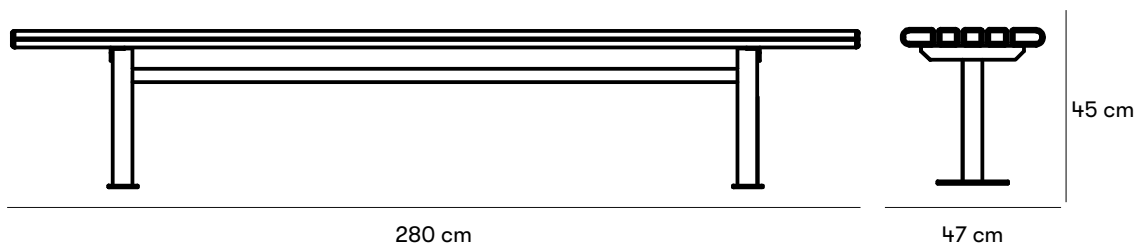

Dimensions and weight

Length: 280 cm
 Width: 47 cm
 Height: 45 cm

Product numbers and combinations

CITY 3000 City bänk.

Append to product number

WOOD AND FINISH

J for jatoba.

METAL SURFACE FINISH

VFZ for hot-dipped galvanized.

Hot-dip galvanized steel is standard. For electro-galvanized and powder-coated steel, enter C and colour.



C for any color other than standard, starting cost is added.

INSTALLATION TYPE

N for surface mount.

M for in-ground.

Standard colours

-  Hot-dip galvanized steel
-  Jatoba

Materials and surface treatments

Jatoba - FSC-certified

Our FSC-labeled Jatoba is an untreated, very hard, and strong hardwood with a long shelf life. It has a brown color with black accent stripes that changes to a deep and rich red color over time.

Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

Hot-dip galvanized or electrogalvanized and powder coating

Available in either only hot-dip galvanized steel or electro-galvanized and powder-coated steel.

Hot-dip galvanizing provides very strong protection against corrosion. The steel is dipped into a bath of hot liquid zinc. The zinc attaches and creates a surface coating on the steel part, which is then taken out of the bath and drained of excess zinc.

Electrogalvanizing provides corrosion protection through the sacrifice of zinc ions. It is created via a zinc coating on the steel using an electric current. Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

Assembly and placement

In-ground

Cast in ground.

Surface mount

Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

Available with bolt holes for fastening to a built surface or with fixtures for casting directly into concrete.

Maintenance

Jatoba

Jotoba basically requires no maintenance apart from regular wiping down.

Powdercoated steel

Products that are powder-coated can be touch-up painted with alkyd paint.

Hot dip galvanized steel

Hot-dip galvanized can be touch-up painted with so-called "cold galvanizing".

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](http://nola.se/en/care-and-maintenance)

Character

An understated urban bench naturally suited to streets, parks and other public spaces.

Designers

Jessing
