

nola®




Tuben Armchair

Design Gunilla Hedlund

Spring arrives to usher in warmer weather, bringing outdoor spaces to life. That's when Tuben's tables and chairs come out of winter storage and return to outdoor patios, central courtyards and roof terraces. The lightweight structure of these stackable designs makes them easy to transport and simple to store. The wooden slats form comfortable seats, while the tubular armrests recall the luxury of an outdoor recliner. Functional and fresh, Tuben bring contemporary style to any setting.

CERTIFICATION

Produkt listad i
Svanens Husportal    **SundaHus**

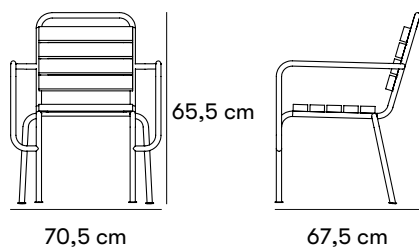

Dimensions and weight

Width: 70,5 cm
 Height: 65,5 cm
 Sitting height: 46 cm
 Depth: 67,5 cm
 Weight 15,5 kg

Product numbers and combinations

U20-84 Tuben armchair (only freestanding)

Append to product number

VARIANTS

V for white. RAL 9010 on steel and NCS S 0502-Y on wood (White).
 G for green. RAL 6021 on steel and NCS S 3020-G20Y on wood (green).
 C for any color other than standard, starting cost is added.

Standard colours

- RAL 9010
- RAL 6021
- NCS S 0502-Y (Vit)
- NCS S 3020-G20Y (grön)

Materials and surface treatments

Pine

Nola's pine is of high quality and comes from sustainable forestry. Pine is an environmentally friendly, domestically produced material. Damaged or untreated pine is quite easily attacked by decomposition processes; therefore, it is particularly important to repair damaged surfaces.

Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

Water-based glaze

Varnishing of wood is done with a water-based varnish. A water-based paint that is kinder to the environment. Under normal use, the paint has a good wear resistance and long durability.

Electrogalvanized

Electrogalvanizing (also known as zinc plating) provides corrosion protection through the sacrifice of zinc ions. It is created via a zinc coating on the steel using an electric current.

Powder coating

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

Assembly and placement

Freestanding

Freestanding product that is placed directly on the ground.

Fully assembled.

Maintenance

Glans 60. Pulverlack går att beställa på sprayflaska.

Water-based glazed pine

Products in varnished pine must be maintained regularly with alkyd paint. Maintenance intervals approximately 1 time per year. Damage and cracks should be repaired immediately. Touch-up paints in spray packaging are available in standard colors to order.

Powdercoated steel

Products that are powder-coated can be touch-up painted with alkyd paint.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

Versions

The furniture group includes a bench, a backed bench a table and an armchair.

Character

Lightweight and stackable armchair with a tubular design.

Designers

Gunilla Hedlund



