

# nola®



## Tuben Bench

Design Gunilla Hedlund

Each part of the Tuben furniture suite is lightweight, efficient and stackable, and has a retro feel. Like the garden furniture designed for coastal areas and warm weather climates, this bench is crafted in a year-round, durable design able to withstand wet environments and temperature extremes. With its understated design and variable colour options, the Tuben bench is well-suited to a wide range of settings.

### CERTIFICATION


Produkt listad i  
Svanens Husportal



BYGGGARU  
BEGRENSSET



**SundaHus**

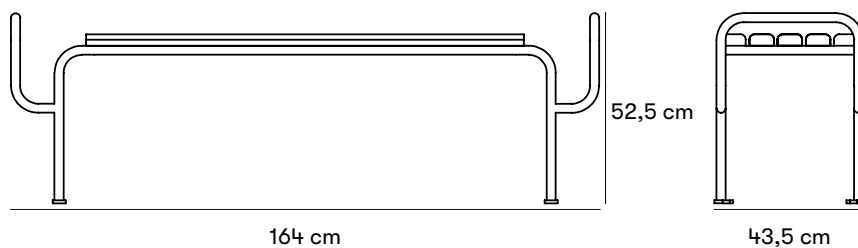

#### Dimensions and weight

Length: 160 cm  
 Width: 43,5 cm  
 Height: 52,5 cm  
 Weight 15,5 kg  
 Seat: 121 x 40,5 cm

#### Product numbers and combinations

U20-72 Tuben bench

##### Append to product number

##### VARIANTS

V for white. RAL 9010 on steel and NCS S 0502-Y on wood (White).  
 G for green. RAL 6021 on steel and NCS S 3020-G20Y on wood (green).  
 C for any color other than standard, starting cost is added.

##### INSTALLATION TYPE

N for surface mount.

#### Standard colours

- ☐ RAL 9010
- ☒ RAL 6021
- ☐ NCS S 0502-Y (Vit)
- ☒ NCS S 3020-G20Y (grön)

#### Materials and surface treatments

##### Pine

Nola's pine is of high quality and comes from sustainable forestry. Pine is an environmentally friendly, domestically produced material. Damaged or untreated pine is quite easily attacked by decomposition processes; therefore, it is particularly important to repair damaged surfaces.

##### Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

##### Water-based glaze

Varnishing of wood is done with a water-based varnish. A water-based paint that is kinder to the environment. Under normal use, the paint has a good wear resistance and long durability.

### **Electrogalvanized**

Electrogalvanizing (also known as zinc plating) provides corrosion protection through the sacrifice of zinc ions. It is created via a zinc coating on the steel using an electric current.

### **Powder coating**

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

## **Assembly and placement**

### **Freestanding**

Freestanding product that is placed directly on the ground.

### **Surface mount**

Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

Assembled.

Freestanding or attachable.

## **Maintenance**

Glans 60. Pulverlack går att beställa på sprayflaska.

### **Water-based glazed pine**

Products in varnished pine must be maintained regularly with alkyd paint. Maintenance intervals approximately 1 time per year. Damage and cracks should be repaired immediately. Touch-up paints in spray packaging are available in standard colors to order.

### **Powdercoated steel**

Products that are powder-coated can be touch-up painted with alkyd paint.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

## **Versions**

White or green.

See also the Tuben backed bench and the Tuben table.

## **Character**

With its understated style and variable colour options, the Tuben bench is a durable design able to withstand wet environments and temperature extremes.

## **Designers**

Gunilla Hedlund



