

# nola®



## Tuben Park Bench

Design Gunilla Hedlund


The Tuben park bench is a year-round, durable design able to withstand wet climates and temperature extremes. Like the other products in the Tuben furniture group, the bench is a lightweight, stackable design. With its efficient design and variable colour options, Tuben is well-suited to a wide range of settings.

### CERTIFICATION

Produkt listad i  
Svanens Husportal



**SundaHus**

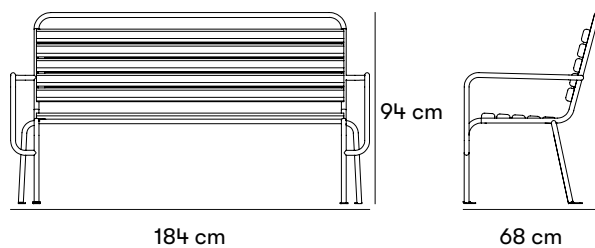

#### Dimensions and weight

Length: 184 cm  
Width: 68 cm  
Height: 94 cm  
Sitting height: 46 cm  
Weight 28 kg

#### Product numbers and combinations

**U20-70** Tuben backed bench

##### Append to product number

##### VARIANTS

V for white. RAL 9010 on steel and NCS S 0502-Y on wood (White).  
G for green. RAL 6021 on steel and NCS S 3020-G20Y on wood (green).  
C for any color other than standard, starting cost is added.

##### INSTALLATION TYPE

N for surface mount.

#### Standard colours

<input type="checkbox"/>	RAL 9010
<input checked="" type="checkbox"/>	RAL 6021
<input type="checkbox"/>	NCS S 0502-Y (Vit)
<input checked="" type="checkbox"/>	NCS S 3020-G20Y (grön)

#### Materials and surface treatments

##### Pine

Nola's pine is of high quality and comes from sustainable forestry. Pine is an environmentally friendly, domestically produced material. Damaged or untreated pine is quite easily attacked by decomposition processes; therefore, it is particularly important to repair damaged surfaces.

##### Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

##### Water-based glaze

Varnishing of wood is done with a water-based varnish. A water-based paint that is kinder to the environment. Under normal use, the paint has a good wear resistance and long durability.

### **Electrogalvanized**

Electrogalvanizing (also known as zinc plating) provides corrosion protection through the sacrifice of zinc ions. It is created via a zinc coating on the steel using an electric current.

### **Powder coating**

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

## **Assembly and placement**

### **Freestanding**

Freestanding product that is placed directly on the ground.

### **Surface mount**

Can be bolted above ground, to the floor or to a cast-in-place foundation. Bolts not included.

Fully assembled.

Freestanding or attached. The legs are extended for mounting beneath the ground.

## **Maintenance**

Glans 60. Pulverlack går att beställa på sprayflaska.

### **Water-based glazed pine**

Products in varnished pine must be maintained regularly with alkyd paint.

Maintenance intervals approximately 1 time per year. Damage and cracks should be repaired immediately. Touch-up paints in spray packaging are available in standard colors to order.

### **Powdercoated steel**

Products that are powder-coated can be touch-up painted with alkyd paint.

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

## **Versions**

White or light green.

The standard wood is pine. Other types of wood are available upon request.

## **Character**

With its understated design and variable colour options, the Tuben backed bench is well-suited to a wide range of settings.

## **Designers**

Gunilla Hedlund

