


nola®



## Ulricehamn Tree Guard

Design Camilla Wessman

Ulricehamn encases trees in an attractive steel structure that guards the trunk against damages caused by vehicles and cycles. The steel bars at the bottom of the frame widen to provide extra room for the trunk's growth and fan outwards at the top to discourage climbing. Ulricehamn is lightweight and easy to position. For best results, it should be paired with a tree grate to protect the roots.

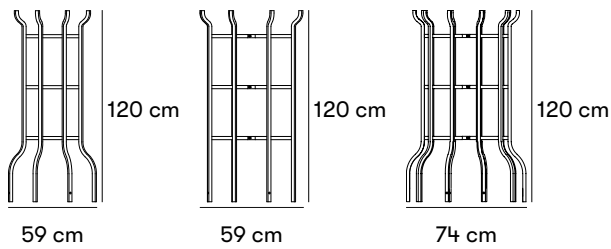

#### Dimensions and weight

Height: 120 cm

Height with security fixtures: 155 cm  
Distance tree guard mounts below ground: 35 cm

Diameter of top: 50 cm

Diameter of base: 60 cm

Diameter of base with security fixtures: 130 cm

Smallest inner diameter: 32 cm

Weight: 40 kg

Weight with security fixtures: 50 kg

#### Individual dimensions

20 x 20 mm solid square steel

#### Product numbers and combinations

Ö20-13 Ulricehamn Standard.

Ö20-13 Umeå - Rak variant av Ulricehamn.

Ö20-13 Luleå - En bredare variant av Ulricehamn.

#### Append to product number

##### METAL SURFACE FINISH

Varmförzinkat och pulverlackerat stål.

Enbart varmförzinkat.

Epoxy och polyuretan svart.

#### Standard colours

■ RAL 9005

#### Materials and surface treatments

##### Steel

Nola uses high-quality steel with good strength in our products. Steel rusts if left untreated and must therefore be surface treated.

##### Hot-dip galvanized

Hot-dip galvanizing provides very strong protection against corrosion. The steel is dipped into a bath of hot liquid zinc. The zinc attaches and creates a surface coating on the steel part, which is then taken out of the bath and drained of excess zinc.

### **Powder coating**

Powder coating is a coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, powder coating is usually applied electrostatically and then cured under heat or with ultraviolet light. The result is an even, hard-wearing coloured surface with the desired gloss level.

### **Assembly and placement**

Some assembly required.

Should be attached to a tree grille at the base or ground-mounted using the attachment fittings (not included, please order separately).

### **Maintenance**

#### **Powdercoated steel**

Products that are powder-coated can be touch-up painted with alkyd paint.

#### **Hot dip galvanized steel**

Hot-dip galvanized can be touch-up painted with so-called "cold galvanizing".

[Read more in our general maintenance advice at nola.se/en/care-and-maintenance](https://nola.se/en/care-and-maintenance)

### **Versions**

Available with a choice of two attachment specifications and a choice of three surface coatings.

### **Character**

An attractive steel tree guard that protects the trunk from damage by vehicles and cycles and discourages climbing.

### **Designers**

---

**Camilla  
Wessman**



